

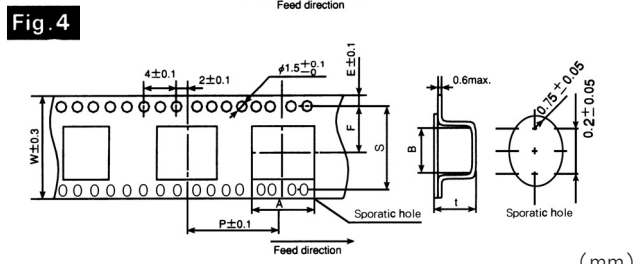
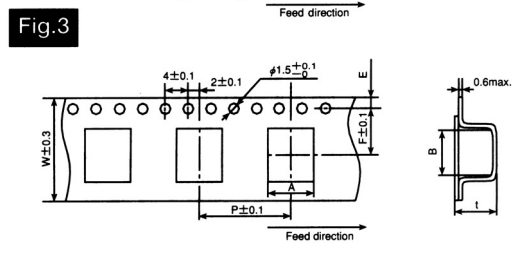
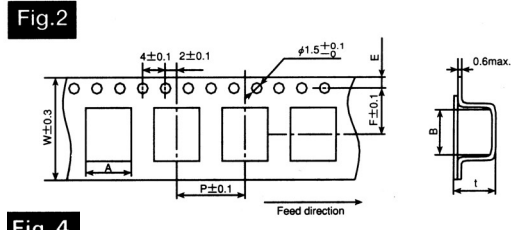


DETAIL SPECIFICATIONS OF TAPING METHOD

■ SURFACE MOUNT TYPE TAPING DIMENSIONS

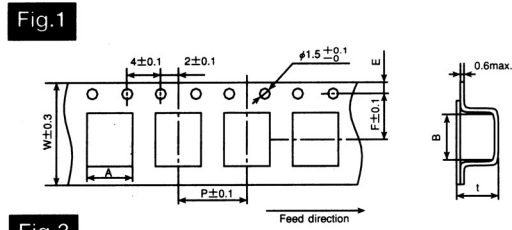


Series	Case Code	Fig	W	A	B	F	E	P	t	S
AL CHIP reALcap™	φ 4(D55,D56)	1	12	4.7±0.2	4.7±0.2	5.5	1.75±0.1	8	5.7±0.2(D55,D56)	-
	φ 5(E55,E56,E61)	2	12	5.7±0.2	5.7±0.2	5.5	1.75±0.1	12	5.7±0.2(E55,E56) 6.3±0.2(E61)	-
	φ 6.3(F55,F56,F60)	2	16	7.0±0.2	7.0±0.2	7.5	1.75±0.1	12	5.7±0.2(F55,F56) 6.3±0.3(F60)	-
	φ 6.3×8L(F80)	2	16	7.0±0.2	7.0±0.2	7.5	1.75±0.1	12	8.2±0.2	-
	φ 8×6L(H63)	2	16	8.7±0.2	8.7±0.2	7.5	1.75±0.1	12	6.8±0.2	-
	φ 8×6.7L(H70)	2	24	8.7±0.2	8.7±0.2	11.5	1.75±0.1	12	7.3±0.2	-
	φ 8×10L(H10)	3	24	8.7±0.2	8.7±0.2	11.5	1.75±0.1	16	11.0±0.2	-
	φ 8×11.5L(H12)	3	24	8.7±0.2	8.7±0.2	11.5	1.75±0.1	16	12.3±0.2	-
	φ 10×8.5L(J85)	3	24	10.7±0.2	10.7±0.2	11.5	1.75±0.1	16	9.1±0.2	-
	φ 10×10L(J10)	3	24	10.7±0.2	10.7±0.2	11.5	1.75±0.1	16	11.0±0.2	-
φ 10×12.2L(J12)	3	24	10.7±0.2	10.7±0.2	11.5	1.75±0.1	16	13.0±0.2	-	
φ 12.5×13.5L(K14)	4	32	13.4±0.2	13.4±0.2	14.2	1.75±0.1	24	14.0±0.2	28.4±0.1	

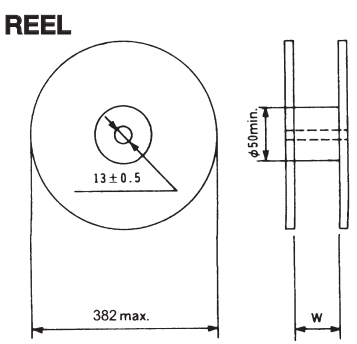


QUANTITY PER REEL

Series	Case Code	W(mm)	Q'ty(pcs/reel)	Q'ty(pcs/box)
AL CHIP reALcap™	φ 4(D55,D56)	14	2,000	20,000
	φ 5(E55,E56,E61)	14	1,000	10,000
	φ 6.3(F55,F56,F60)	18	1,000	10,000
	φ 6.3×8L(F80)	18	900	9,000
	φ 8×6L(H63)	18	1,000	10,000
	φ 8×6.7L(H70)	26	1,000	6,000
	φ 8×10L(H10)	26	500	3,000
	φ 8×11.5L(H12)	26	400	2,400
	φ 10×8.5L(J85)	26	500	3,000
	φ 10×10L(J10)	26	500	3,000
φ 10×12.2L(J12)	26	400	2,400	
φ 12.5×13.5L(K14)	34	200	1,000	

ORIENTATION OF POLARITY

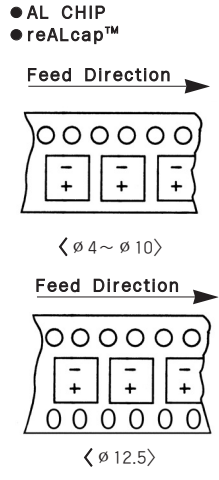

■ SURFACE MOUNT TYPE(TRAY)







QUANTITY PER TRAY/BOX

Case Code	H (mm)	W1 (mm)	H1 (mm)	Q'ty (pcs/tray)	Q'ty (pcs/box)
L17~L22	28.0	284	24.0	80	160,400
M17~M22	28.0	284	24.0	60	120,300

MINIATURE TYPE

Unit(mm)

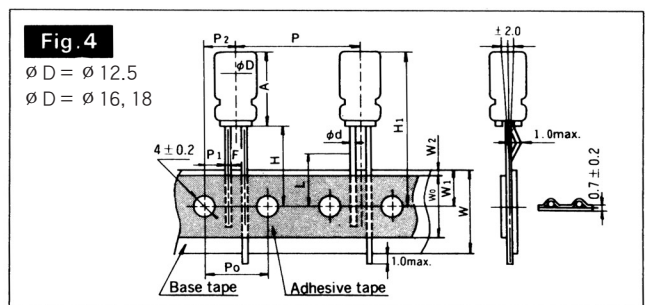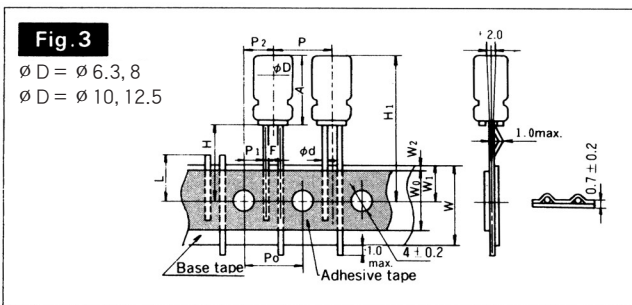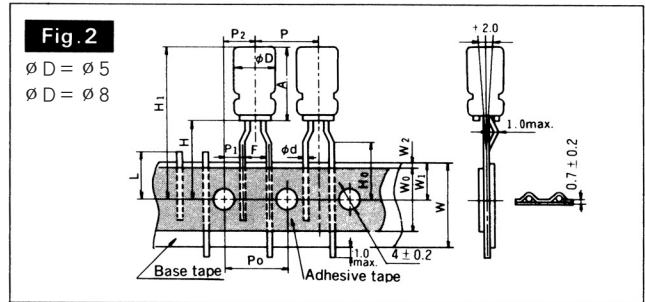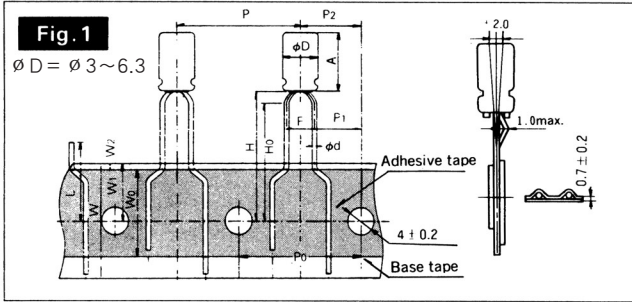

Code	Case size		ϕd	P	P ₀	P ₁	P ₂	F	W	W ₀	W ₁	W ₂	H	H ₀	H ₁	L	Fig.
	ϕD	A															
Tol.	± 0.5	※1)	± 0.05	± 1.0	± 0.2	± 0.7	± 1.0	$+0.8$ -0.2	± 0.5	min.	± 0.5	max.	± 0.75	± 0.5	-	max.	
Nominal	4	5~7	0.45	12.7	12.7	5.1	6.35	2.5	18.0	10	9.0	1.5	18.2	-	-	11.0	1
						3.85		5.0					17.5	16.0			2
	5	5~7	0.45	12.7	12.7	5.1	6.35	2.5	18.0	10	9.0	1.5	18.2	-	-	11.0	1
						3.85		5.0					17.5	16.0			2
	5	11~15	0.5	12.7	12.7	5.1	6.35	2.5	18.0	10	9.0	1.5	18.5	17.2	-	11.0	2
						3.85		5.0					16.0	2			
	6.3	5~7	0.45	12.7	12.7	5.1	6.35	2.5	18.0	10	9.0	1.5	18.2	-	-	11.0	3
						3.85		5.0					17.5	16.0			2
	6.3	9~15	0.5	12.7	12.7	5.1	6.35	2.5	18.0	10	9.0	1.5	18.5	-	-	11.0	3
						3.85		5.0					16.0	2			
	8	※2) 5	0.45	12.7	12.7	5.1	6.35	2.5	18.0	10	9.0	1.5	18.2	-	-	11.0	3
						3.85		5.0					17.5	16.0			2
7		0.45	12.7	12.7	5.1	6.35	3.5	18.0	10	9.0	1.5	20	-	-	11.0	3	
					3.85		5.0					18.5	16.0			2	
9	0.6	12.7	12.7	5.1	6.35	3.5	18.0	10	9.0	1.5	20	-	-	11.0	3		
				3.85		5.0					16.0	2					
9	11~20	0.6	12.7	12.7	4.6	6.35	3.5	18.0	10	9.0	1.5	18.5	-	-	11.0	3	
					3.85		5.0					15.7	2				
Tol.	± 0.5	max.	± 0.05	± 1.0	± 0.3	± 0.7	± 1.3	$+0.8$ -0.2	± 0.5	min.	± 0.5	max.	± 0.75	-		max.	
Nominal	10	27	0.6	12.7	12.7	3.85	6.35	5.0	18.0	12.5	9.0	1.5	18.5	-	-	11.0	3
						5.0		5.0					18.5	-			3
	12.5	27	0.6	15	15	5.0	7.5	5.0	18.0	12.5	9.0	1.5	18.5	-	-	11.0	3
						3.85		6.35					5.0	18.5			-
16	37.5	0.8	30	15	3.75	7.5	7.5	18.0	12.5	9.0	3.0	18~20	-	-	11.0	4	
					3.75		7.5					7.5	18~20			-	4

H₁ = H + A
Check insertion machine specs.

● P = 25.4 tapping is not standard. Use P = 15 tapping.
 ※1) Refer to the drawing of each series for tolerance.
 ※2) $\phi 8 \times 5L$ (Height) is 6.5mm max.