


AHS Series

• 85°C 2,000Hrs assured.

- Non-solvent proof.
- Hi-Fi Audio grade.
- For Audio, AMP, AVR.
- RoHS compliant.
- Halogen-free capacitors are also available.



SPECIFICATIONS

Item	Characteristics				
Rated Voltage Range	50 ~ 100 V _{DC}				
Operating Temperature Range	-40 ~ +85°C				
Capacitance Tolerance	±20%(M) (at 20°C, 120Hz)				
Leakage Current	I = 0.01CV or 2mA, whichever is smaller. Where, I: Leakage current (µA) C: Nominal capacitance (µF) V: Rated voltage (V _{DC}) (at 20°C, 5 minutes)				
Dissipation Factor(Tanδ)	Tanδ shall not exceed the value shown in the table of RATINGS. (at 20°C, 120Hz)				
Temperature Characteristics (Max.Impedance ratio)	<table border="1"> <tr> <td>Z(-25°C)/Z(20°C)</td> <td>4</td> </tr> <tr> <td>Z(-40°C)/Z(20°C)</td> <td>15</td> </tr> </table> (at 120Hz)	Z(-25°C)/Z(20°C)	4	Z(-40°C)/Z(20°C)	15
Z(-25°C)/Z(20°C)	4				
Z(-40°C)/Z(20°C)	15				
Load Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied for 2,000 hours at 85°C. Capacitance change ≤ ±20% of the initial value. Tanδ ≤ 200% of the initial specified value. Leakage current ≤ The initial specified value				
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them at 85°C for 1,000 hours without voltage applied. The rated voltage shall be applied to the capacitors for a minimum of 30 minutes, at least 24 hours and not more than 48 hours before the measurements. Capacitance change ≤ ±20% of the initial value. Tanδ ≤ 200% of the initial specified value. Leakage current ≤ The initial specified value				
Charge & Discharge	5,000 times (at 70°C) After this test is completed, the capacitors shall be satisfied the following specifications. Capacitance change ≤ ±20% of the initial value. Tan δ ≤ 150% of the initial specified value. Leakage current ≤ The initial specified value No visible damage and no leakage electrolyte where, Charge resistance: 2.2Ω Charge conditions: rated volt. 1(A) Discharge resistance: 100Ω Charge and discharge time: 30 sec(each)				
Others	Satisfied characteristics KS C IEC 60384-4				

DIMENSIONS OF AHS/DL Series

Unit(mm)

∅ D= ∅ 22~ ∅ 35 VN/VS type

∅ D= ∅ 35~ ∅ 40 VR type (4 terminals)

B: Positive terminal.
A, C: Terminals not connected electrically but used for mechanical support only. (Blank Terminals)

Marking : AHS-DARK BROWN SLEEVE, GOLD INK
DL-BLACK SLEEVE, SILVER INK

The standard design has no bottom plate. Note: Sleeve has an insulating role.


CAUTION: Please use the blank terminals for mechanical support only. The blank terminals must not be connected to a solder trace on the PC board, but be electrically isolated from negative or positive terminal.

RATINGS OF AHS Series

μF \ Vbc	50			63			80			100		
3,300	25.4 × 30	0.20	1.84	25.4 × 40	0.20	1.96	25.4 × 50	0.15	2.39	30 × 60	0.15	2.68
	30 × 25	0.20	1.86	30 × 30	0.20	1.96	30 × 40	0.15	2.40	35 × 50	0.15	2.69
							35 × 35	0.15	2.40	40 × 40	0.15	2.68
4,700	25.4 × 40	0.20	2.34	25.4 × 50	0.20	2.47	25.4 × 60	0.15	3.01	35 × 60	0.15	2.98
	30 × 30	0.20	2.36	30 × 40	0.20	2.48	30 × 50	0.15	3.04	40 × 50	0.20	2.92
				35 × 30	0.20	2.48	35 × 40	0.15	3.02			
6,800	25.4 × 50	0.22	2.83	30 × 50	0.22	3.02	30 × 60	0.15	3.35	40 × 60	0.20	3.68
	30 × 40	0.22	2.85	35 × 40	0.22	3.00	35 × 50	0.15	3.35			
	35 × 35	0.25	2.67				40 × 40	0.20	3.34			
8,200	30 × 50	0.25	3.11	30 × 60	0.25	3.27	35 × 60	0.20	3.87			
	35 × 40	0.25	3.09	35 × 50	0.25	3.28	40 × 50	0.20	3.86			
				40 × 40	0.25	3.28						
10,000	30 × 50	0.25	3.43	35 × 60	0.25	3.82	40 × 60	0.20	4.46			
	35 × 40	0.25	3.41	40 × 50	0.25	3.81						
12,000	30 × 60	0.25	3.66	35 × 60	0.25	4.19						
	35 × 50	0.30	3.62	40 × 50	0.25	4.18						
	40 × 40	0.30	3.62									
15,000	35 × 60	0.30	4.27	40 × 60	0.30	4.46						
	40 × 50	0.30	4.26									
22,000	40 × 60	0.30	5.40									

↑ Rated Ripple Current (Arms/85°C, 120Hz)
 ↑ Tan δ (Max.)
 ↑ Case Size $\phi D \times L$ (mm)

Frequency vs. Impedance Graph

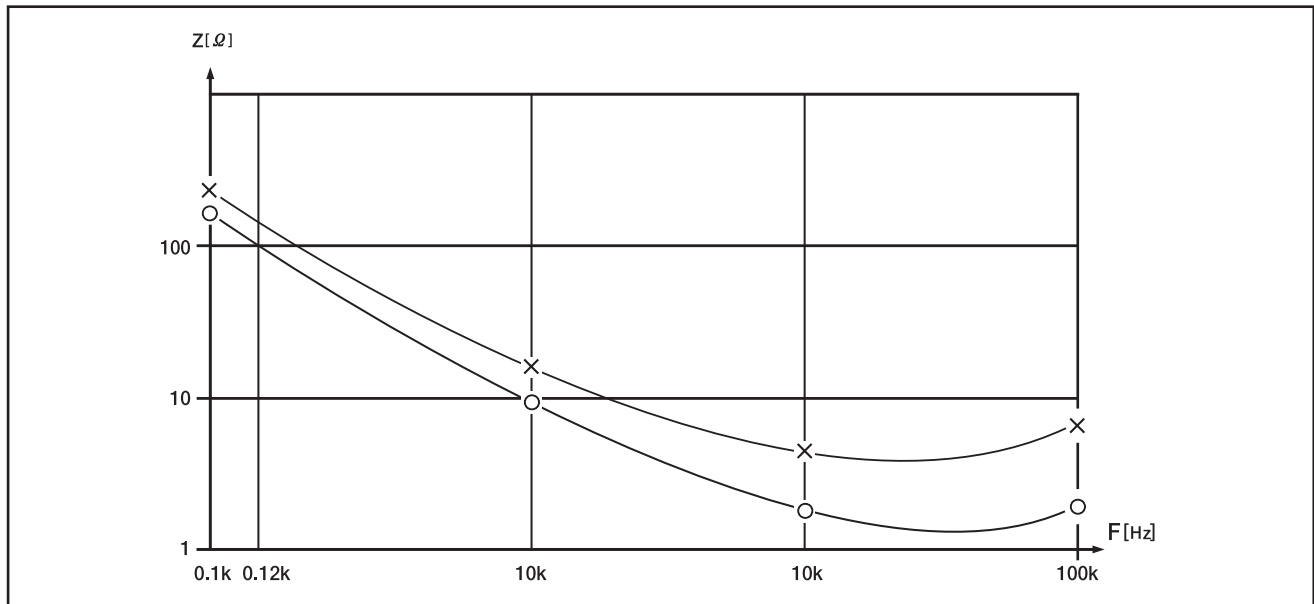

○ - ○ AHS 80 VR 8200
 x - x DL 80 VR 8200