


## PH Series

• 5~35°C 5,000Times.

- Non-solvent proof.
- For photo flash.
- RoHS compliant.

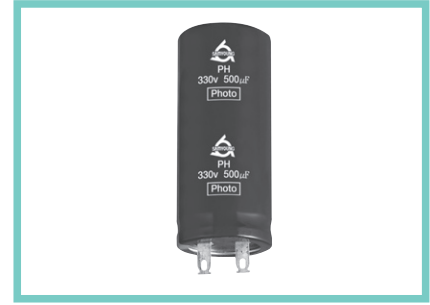

### SPECIFICATIONS

Item	Characteristics				
Rated Voltage	330 V <sub>DC</sub>				
Operating Temperature Range	-20 ~ +55°C				
Capacitance Tolerance	-10 ~ +20%(V) (at 20°C, 120Hz)				
Leakage Current	I=1×C Where, I: Leakage current (µA) C: Nominal capacitance (µF) (at 20°C, 5 minutes)				
Dissipation Factor(Tanδ)	<table border="1"> <tr> <td>Cap. ≤600µF</td> <td>0.10</td> </tr> <tr> <td>Cap. &gt;600µF</td> <td>0.15</td> </tr> </table> (at 20°C, 120Hz)	Cap. ≤600µF	0.10	Cap. >600µF	0.15
Cap. ≤600µF	0.10				
Cap. >600µF	0.15				
Charge and Discharge Characteristics	<p>The following specifications shall be satisfied when the capacitors are restored to 20°C after charge and discharge are repeated 5,000 times at room temperature. (5 to 35°C)</p> <p>Charge voltage: rated voltage            Charge and discharge cycles:30 seconds            Discharge resistance or Xenon tube:about 1 Ω</p> <p>Capacitance change ≤ ±10% of the initial value            Tanδ ≤ 150% of the initial specified value            Leakage current ≤ 150% of the initial specified value</p>				
Shelf Life	<p>The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them at 55°C for 1,000 hours without voltage applied.</p> <p>Capacitance change ≤ ±10% of the initial value            Tanδ ≤ 150% of the initial specified value            Leakage current ≤ 300% of the initial specified value</p>				
Others	Satisfied EIAJ RC-3801A				

### RATINGS OF PH Series

µF	V <sub>DC</sub> 330		µF	V <sub>DC</sub> 330	
	SV			SV	
165	16 × 27		500	25.4 × 54	
180	14.5 × 35, 18 × 29		700	30 × 54	
250	16 × 39		950	35 × 50	
260	16 × 45		1,000	35 × 50	
280	20 × 28		1,500	35 × 60	
320	22 × 40		2,000	35 × 80	
420	22 × 50				

↑  
Case Size ∅D×L(mm)

Note: Case sizes are changeable upon your requests.

### DIMENSIONS

Unit(mm)

