

RDA Series

• 85°C 2,000Hrs assured.

- Non-solvent proof.
- Downsized of SMH series.
- For SMPS, Inverter
- RoHS compliant.



SPECIFICATIONS

Item	Characteristics																												
Rated Voltage Range	16 ~ 100 V _{DC}	160 ~ 500 V _{DC}																											
Operating Temperature Range	-40 ~ +85°C	-25 ~ +85°C																											
Capacitance Tolerance	±20% (M) (at 20°C, at 120Hz)																												
Leakage Current	I = 0.02CV(µA) or 3mA, whichever is smaller Where, I:Max. leakage current(µA) C:Nominal capacitance(µF) V:Rated voltage(V _{DC}) (at 20°C, 5 minutes)																												
※ Dissipation Factor (Tanδ)	<table border="1"> <thead> <tr> <th>Rated Voltage(V_{DC})</th> <th>16</th> <th>25</th> <th>35</th> <th>50~63</th> <th>100</th> <th>160~250</th> <th>315~400</th> <th>450~500</th> </tr> </thead> <tbody> <tr> <td>Tanδ(Max.)</td> <td>0.40</td> <td>0.35</td> <td>0.30</td> <td>0.25</td> <td>0.20</td> <td>0.15</td> <td>0.15</td> <td>0.20</td> </tr> </tbody> </table> (at 20°C, 120Hz)		Rated Voltage(V _{DC})	16	25	35	50~63	100	160~250	315~400	450~500	Tanδ(Max.)	0.40	0.35	0.30	0.25	0.20	0.15	0.15	0.20									
Rated Voltage(V _{DC})	16	25	35	50~63	100	160~250	315~400	450~500																					
Tanδ(Max.)	0.40	0.35	0.30	0.25	0.20	0.15	0.15	0.20																					
Temperature Characteristics (Max.Impedance ratio)	Maximum impedance ratio at 120Hz to the 20°C value: (at 120Hz) <table border="1"> <thead> <tr> <th>Rated Voltage(V_{DC})</th> <th>16</th> <th>25</th> <th>35</th> <th>50~63</th> <th>100</th> <th>160~250</th> <th>315~400</th> <th>450~500</th> </tr> </thead> <tbody> <tr> <td>Z(-25°C)/Z(20°C)</td> <td>4</td> <td>3</td> <td>3</td> <td>2</td> <td>2</td> <td>4</td> <td>4</td> <td>8</td> </tr> <tr> <td>Z(-40°C)/Z(20°C)</td> <td>15</td> <td>10</td> <td>8</td> <td>6</td> <td>5</td> <td>-</td> <td>-</td> <td>-</td> </tr> </tbody> </table>		Rated Voltage(V _{DC})	16	25	35	50~63	100	160~250	315~400	450~500	Z(-25°C)/Z(20°C)	4	3	3	2	2	4	4	8	Z(-40°C)/Z(20°C)	15	10	8	6	5	-	-	-
Rated Voltage(V _{DC})	16	25	35	50~63	100	160~250	315~400	450~500																					
Z(-25°C)/Z(20°C)	4	3	3	2	2	4	4	8																					
Z(-40°C)/Z(20°C)	15	10	8	6	5	-	-	-																					
Load Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for 2,000 hours at 85°C Capacitance change ≤ ±20% of the initial value TANδ ≤ 200% of the initial specified value Leakage Current ≤ The initial specified value																												
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them at 85°C for 1,000 hours without voltage applied. The rated voltage shall be applied to the capacitors for a minimum of 30 minutes, at least 25 hours and not more than 48 hours before the measurement. Capacitance change ≤ ±20% of the initial value TANδ ≤ 200% of the initial specified value Leakage Current ≤ The initial specified value																												
Others	Satisfied characteristics W of KS C 6421																												

※ For capacitors with CV products > 100,000 Higher Tanδ value may apply.
When the capacitance exceed 1,000µF, 0.01 shall be added every 1,000µF increase.

RATED RIPPLE CURRENT


When capacitors are operated in any other condition at 120Hz, the maximum ripple current must be multiplied by the figure shown in the table.

Frequency multiplying factor

Frequency(Hz)	60	120	300	1k	10k~
16~50V _{DC}	0.95	1.00	1.03	1.05	1.08
63~100V _{DC}	0.92	1.00	1.07	1.13	1.19
160~250V _{DC}	0.81	1.00	1.17	1.32	1.45
315~500V _{DC}	0.77	1.00	1.16	1.30	1.41

DIMENSIONS OF RDA Series

Unit (mm)

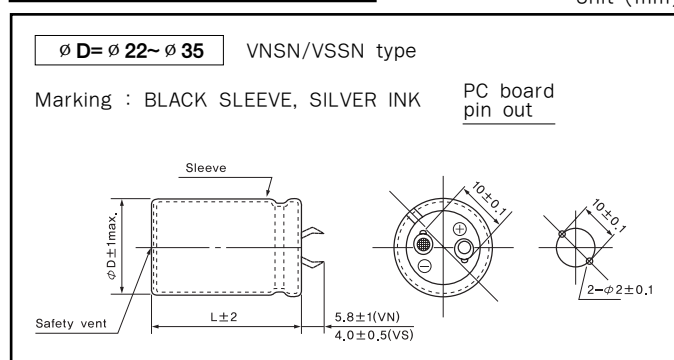



RATINGS OF RDA Series

μF	V _{DC} ∅ D	16(1C)				25(1E)				35(1V)			
		22	25.4	30	35	22	25.4	30	35	22	25.4	30	35
3,900										22 × 25 2.22			
4,700										22 × 30 2.41	25.4 × 25 2.42		
5,600					22 × 25 2.21					22 × 35 2.75	25.4 × 25 2.64		
6,800					22 × 30 2.40	25.4 × 25 2.56				22 × 40 2.80	25.4 × 30 2.74	30 × 25 2.97	
8,200	22 × 25 2.51				22 × 35 2.72	25.4 × 25 2.80				22 × 45 3.11	25.4 × 35 3.10	30 × 30 3.13	
10,000	22 × 25 2.77				22 × 40 3.09	25.4 × 30 3.12	30 × 25 3.21				25.4 × 40 3.53	30 × 30 3.46	35 × 25 3.20
12,000	22 × 30 2.86	25.4 × 25 2.95			22 × 45 3.48	25.4 × 35 3.43	30 × 30 3.86	35 × 25 3.54			25.4 × 45 3.98	30 × 35 4.01	35 × 30 4.02
15,000	22 × 35 3.29	25.4 × 30 3.46	30 × 25 3.66		22 × 50 4.00	25.4 × 40 3.95	30 × 30 4.00	35 × 25 3.95				30 × 40 4.90	35 × 35 5.01
18,000	22 × 40 3.72	25.4 × 35 3.98	30 × 30 3.98			25.4 × 45 4.45	30 × 35 4.46	35 × 30 4.63				30 × 45 5.43	35 × 40 5.54
22,000	22 × 50 4.37	25.4 × 40 4.26	30 × 30 4.21			25.4 × 50 5.02	30 × 45 5.21	35 × 35 5.16					35 × 45 6.04
27,000		25.4 × 45 4.72	30 × 35 4.82				30 × 50 5.94	35 × 40 5.92					35 × 50 6.89
33,000			30 × 40 5.36	35 × 30 5.15				35 × 45 6.75					
39,000			30 × 45 6.01	35 × 35 5.95				35 × 50 7.56					
47,000			30 × 50 6.79	35 × 40 6.76									
56,000				35 × 45 7.62									

μF	V _{DC} ∅ D	50(1H)				63(1J)				100(2A)			
		22	25.4	30	35	22	25.4	30	35	22	25.4	30	35
820										22 × 25 1.86			
1,000										22 × 30 1.93			
1,200										22 × 30 2.09	25.4 × 25 2.10		
1,500										22 × 35 2.41	25.4 × 30 2.34	30 × 25 2.46	
1,800					22 × 25 1.82					22 × 40 2.71	25.4 × 35 2.75	30 × 25 2.72	
2,200	22 × 25 1.91				22 × 30 2.31	25.4 × 25 2.30				22 × 45 3.08	25.4 × 40 3.13	30 × 30 3.09	35 × 25 3.14
2,700	22 × 30 2.11	25.4 × 25 2.13			22 × 35 2.43	25.4 × 30 2.43					25.4 × 45 3.57	30 × 35 3.55	35 × 30 3.71
3,300	22 × 30 2.37	25.4 × 25 2.38			22 × 35 2.62	25.4 × 30 2.64	30 × 25 2.78				25.4 × 50 4.06	30 × 40 4.05	35 × 30 4.05
3,900	22 × 35 2.65	25.4 × 30 2.68			22 × 40 2.93	25.4 × 35 2.97	30 × 30 3.00					30 × 45 4.54	35 × 35 4.49
4,700	22 × 40 2.99	25.4 × 35 3.03	30 × 25 2.81		22 × 50 3.39	25.4 × 40 3.36	30 × 30 3.32	35 × 25 3.36				30 × 50 5.11	35 × 40 5.11
5,600	22 × 45 3.36	25.4 × 35 3.31	30 × 30 3.37	35 × 25 3.42		25.4 × 45 3.77	30 × 35 3.75	35 × 30 3.76					35 × 45 5.75
6,800	22 × 50 3.81	25.4 × 40 3.81	30 × 35 3.85	35 × 30 3.85		25.4 × 50 4.27	30 × 40 4.27	35 × 30 4.15					
8,200		25.4 × 50 4.37	30 × 40 4.36	35 × 30 4.41			30 × 45 4.83	35 × 35 4.79					
10,000			30 × 45 4.97	35 × 35 4.92			30 × 50 5.49	35 × 40 5.47					
12,000			30 × 50 5.60	35 × 40 5.58				35 × 45 6.19					
15,000				35 × 45 6.44									
18,000				35 × 50 6.71									
20,000													

← Case Size ∅ D×L(mm)
 ← Rated Ripple Current(Arms/85°C, 120Hz)



LARGE SIZED ALUMINUM ELECTROLYTIC CAPACITORS

RATINGS OF RDA Series

μF	Vdc ∅ D	160(2C)				200(2D)				250(2E)			
		22	25.4	30	35	22	25.4	30	35	22	25.4	30	35
100										22 × 20 0.73			
120										22 × 20 0.80			
150						22 × 20 0.88				22 × 25 0.95	25.4 × 20 0.98		
180		22 × 20 1.03				22 × 20 1.05				22 × 25 1.12	25.4 × 20 1.13		
220		22 × 20 1.10				22 × 25 1.18	25.4 × 20 1.20			22 × 25 1.15	25.4 × 25 1.18	30 × 20 1.20	
270		22 × 25 1.32	25.4 × 20 1.35			22 × 25 1.27	25.4 × 20 1.24	30 × 20 1.26		22 × 30 1.31	25.4 × 25 1.32	30 × 20 1.28	
330		22 × 25 1.43	25.4 × 20 1.46			22 × 30 1.45	25.4 × 25 1.42	30 × 20 1.44		22 × 35 1.49	25.4 × 30 1.51	30 × 25 1.48	35 × 20 1.51
390		22 × 25 1.53	25.4 × 25 1.56	30 × 20 1.60		22 × 30 1.59	25.4 × 25 1.58	30 × 20 1.58	35 × 20 1.26	22 × 40 1.67	25.4 × 30 1.63	30 × 25 1.66	35 × 20 1.67
470		22 × 30 1.73	25.4 × 25 1.74	30 × 20 1.76	35 × 20 1.80	22 × 35 1.78	25.4 × 30 1.80	30 × 25 1.80	35 × 20 1.80	22 × 45 1.88	25.4 × 35 1.86	30 × 30 1.89	35 × 25 1.89
560		22 × 35 1.95	25.4 × 25 1.89	30 × 25 1.88	35 × 20 1.90	22 × 40 2.00	25.4 × 30 1.97	30 × 25 2.01	35 × 20 2.03	22 × 50 2.13	25.4 × 40 2.09	30 × 35 2.14	35 × 25 2.09
680		22 × 35 2.15	25.4 × 30 2.16	30 × 25 2.19	35 × 20 2.19	22 × 45 2.27	25.4 × 35 2.24	30 × 30 2.28	35 × 25 2.28		25.4 × 50 2.44	30 × 40 2.43	35 × 30 2.46
820		22 × 40 2.42	25.4 × 35 2.45	30 × 30 2.50	35 × 25 2.49	22 × 50 2.58	25.4 × 40 2.53	30 × 35 2.59	35 × 25 2.60			30 × 45 2.75	35 × 35 2.77
1,000		22 × 45 2.75	25.4 × 40 2.79	30 × 30 2.78	35 × 25 2.80		25.4 × 45 2.88	30 × 40 2.95	35 × 30 2.90			30 × 50 3.31	35 × 35 3.22
1,200			25.4 × 45 3.15	30 × 35 3.13	35 × 30 3.27			30 × 45 3.34	35 × 35 3.31				35 × 40 3.42
1,500			25.4 × 50 3.60	30 × 40 3.63	35 × 30 3.57			30 × 50 3.84	35 × 40 3.82				35 × 50 4.06
1,800				30 × 45 4.09	35 × 35 4.05				35 × 45 4.33				
2,200					35 × 40 4.63				35 × 50 4.92				
2,700					35 × 45 5.30								

μF	Vdc ∅ D	315(2F)				350(2V)				400(2G)			
		22	25.4	30	35	22	25.4	30	35	22	25.4	30	35
47										22 × 20 0.36			
56										22 × 20 0.40			
68										22 × 20 0.46	25.4 × 20 0.48		
82										22 × 25 0.71	25.4 × 20 0.72		
100		22 × 25 0.77								22 × 25 0.78	25.4 × 20 0.78	30 × 20 0.79	
120		22 × 25 0.85				22 × 25 0.85				22 × 30 0.88	25.4 × 25 0.87	30 × 20 0.90	
150		22 × 30 0.98	25.4 × 25 0.98			22 × 30 0.98	25.4 × 25 0.99			22 × 35 1.02	25.4 × 30 1.02	30 × 25 1.03	35 × 20 1.03
180		22 × 35 1.10	25.4 × 25 1.11			22 × 35 1.11	25.4 × 30 1.11			22 × 40 1.14	25.4 × 30 1.11	30 × 25 1.13	35 × 20 1.14
220		22 × 40 1.26	25.4 × 30 1.23	30 × 25 1.25		22 × 40 1.26	25.4 × 30 1.23	30 × 25 1.25		22 × 45 1.29	25.4 × 35 1.27	30 × 30 1.30	35 × 25 1.27
270		22 × 45 1.43	25.4 × 35 1.41	30 × 30 1.43	35 × 25 1.45	22 × 45 1.49	25.4 × 35 1.46	30 × 30 1.49		22 × 50 1.48	25.4 × 40 1.45	30 × 35 1.48	35 × 25 1.49
330		22 × 50 1.62	25.4 × 40 1.61	30 × 30 1.62	35 × 25 1.61	22 × 50 1.66	25.4 × 40 1.63	30 × 35 1.67	35 × 25 1.65		25.4 × 45 1.65	30 × 35 1.65	35 × 30 1.67
390			25.4 × 45 1.79	30 × 35 1.78	35 × 30 1.86		25.4 × 45 1.88	30 × 35 1.88	35 × 30 1.94		25.4 × 50 1.84	30 × 40 1.85	35 × 35 1.88
470				30 × 40 2.02	35 × 35 2.07		25.4 × 50 2.18	30 × 40 2.20	35 × 30 2.25			30 × 45 2.09	35 × 35 2.07
560				30 × 45 2.28	35 × 40 2.33			30 × 45 2.40	35 × 35 2.37				35 × 40 2.34
680					35 × 45 2.66				35 × 40 2.78				35 × 50 2.74
820					35 × 50 3.00				35 × 45 3.15				

← Case Size ∅ D × L (mm)
 ← Rated Ripple Current (Arms/85°C, 120Hz)



RATINGS OF RDA Series

μF	V _{DC} ∅ D	450(2W)				500(2H)			
		22	25.4	30	35	22	25.4	30	35
68	22 × 25 0.64					22 × 35 0.40			
82	22 × 25 0.70					22 × 35 0.51	25.4 × 30 0.53		
100	22 × 30 0.80	25.4 × 25 0.80					25.4 × 40 0.69		
120	22 × 35 0.91	25.4 × 30 0.91	30 × 25 0.92				25.4 × 45 0.86		
150	22 × 40 1.04	25.4 × 35 1.05	30 × 25 1.03				25.4 × 50 0.91	30 × 35 0.88	
180	22 × 45 1.18	25.4 × 35 1.15	30 × 30 1.17	35 × 25 1.20			25.4 × 60 0.96	30 × 40 0.99	
220	22 × 50 1.33	25.4 × 40 1.31	30 × 35 1.36	35 × 25 1.35				30 × 45 1.15	
270		25.4 × 45 1.55	30 × 40 1.60	35 × 30 1.59				30 × 60 1.44	35 × 40 1.36
330			30 × 45 1.90	35 × 35 1.88					35 × 45 1.49
390			30 × 50 2.09	35 × 40 2.08					35 × 50 1.71
470				35 × 45 2.40					35 × 60 2.08
560				35 × 50 2.70					35 × 60 2.32

← Case Size ∅ D × L(mm)

← Rated Ripple Current(Arms/85°C, 120Hz)