




MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

DSA Series

- Non-solvent proof.
- Height 5mm.
- For CAR-Audio, Tuner.

- 85°C 2,000Hrs assured.

- RoHS compliant.
- Halogen-free capacitors are also available.

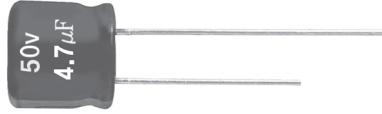

DZA Series

- Solvent proof.
- Height 5mm.
- Reflow Application.
- For CAR-Audio, Tuner.

- 85°C 2,000Hrs assured.

- RoHS compliant.
- Halogen-free capacitors are also available.



Solvent-proof


Reflow Application

SPECIFICATIONS

Item	Characteristics							
Rated Voltage Range	4 ~ 50 V _{DC}							
Operating Temperature Range	- 40 ~ + 85°C							
Capacitance Tolerance	$\pm 20\%$ (M) (at 20°C, 120Hz)							
Leakage Current	$I = 0.01CV(\mu A)$ or $3\mu A$, whichever is greater. Where, I:Max. Leakage current(μA), C:Nominal capacitance(μF), V:Rated voltage(V_{DC}) (at 20°C, 2 minutes)							
Dissipation Factor($\tan \delta$)	Rated Voltage(V_{DC})	4	6.3	10	16	25	35	50
	$\tan \delta$ (Max.)	0.38	0.35	0.32	0.30	0.18	0.14	0.12
	(at 20°C, 120Hz)							
Temperature Characteristics (Max. Impedance ratio)	Rated Voltage(V_{DC})	4	6.3	10	16	25	35~50	
	$Z(-25^{\circ}C)/Z(20^{\circ}C)$	7	4	3	2	2	2	
	$Z(-40^{\circ}C)/Z(20^{\circ}C)$	15	10	8	5	4	3	(at 120Hz)
Load Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for 2,000 hours at 85°C. Capacitance change $\leq \pm 20\%$ of the initial value $\tan \delta \leq 200\%$ of the initial specified value Leakage current \leq The initial specified value							
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 85°C without voltage applied. The rated voltage shall be applied to the capacitors for a minimum of 30 minutes, at least 24 hours and not more than 48 hours before the measurements. Capacitance change $\leq \pm 20\%$ of the initial value $\tan \delta \leq 200\%$ of the initial specified value Leakage current $\leq 200\%$ of the initial specified value							
Others	Satisfied characteristics KS C IEC 60384-4							

DIMENSIONS OF DSA/DZA

Unit(mm)

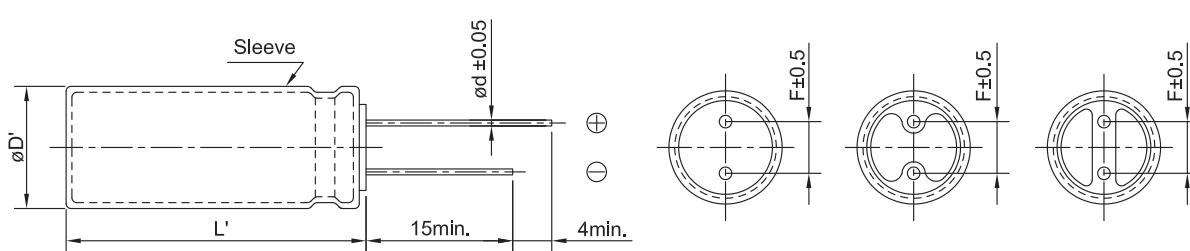

Marking- DSA : BLACK SLEEVE, WHITE INK
DZA : GREEN SLEEVE, BLACK INK

ϕD	4	5	6.3	8
ϕd	0.45	0.45	0.45	0.45
F	1.5	2.0	2.5	2.5
$\phi D'$	$\phi D + 0.5$ max.			
L'	$L + 1.0$ max.			

RATINGS OF DSA/DZA Series

μF	V _{DC}	4	6.3	10	16	25	35	50
1								4×5 8.6
2.2								4×5 11
3.3								4×5 14
4.7							4×5 15	4×5 17
6.8						4×5 17	4×5 18	5×5 22
10					4×5 20	4×5 21	5×5 25	5×5 27
15				4×5 22	4×5 24	5×5 28	5×5 31	6.3×5 36
22			4×5 24	4×5 27	5×5 32	5×5 35	6.3×5 40	6.3×5 45
33	4×5 23	4×5 30	5×5 35	5×5 40	6.3×5 45	6.3×5 50	8×5 61	
47	4×5 28	4×5 36	5×5 43	6.3×5 50	6.3×5 59	8×5 65		
68	5×5 33	5×5 48	6.3×5 54	6.3×5 60	8×5 74			
100	5×5 48	6.3×5 60	6.3×5 72	6.3×5 77	8×5 90			
150	6.3×5 70	6.3×5 72	8×5 88					
220	6.3×5 79	8×5 93	8×5 98					
330	8×5 95	8×5 141						

← Case Size Ø D × L (mm)
← Rated Ripple Current (mA rms/85°C, 120Hz)

RECOMMENDED REFLOW SOLDERING CONDITIONS(For DZA Series)

Surface temp.(top of the capacitor) (°C)	Time of Preheat temp. (from 150°C to 200°C)	Time to be Maintained Above 217°C	Time to be Maintained Above 230°C	Peak Temp.	Reflow Cycle
217	60 ~ 100 Sec	60 ~ 70 Sec	20 ~ 30 Sec	250°C (10 Sec ↓)	1 TIME

TEMPERATURE PROFILE