




MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

DSA Series

- Non-solvent proof.
- Height 5mm.
- For CAR-Audio, Tuner.

- 85°C 2,000Hrs assured.

- RoHS compliant.
- Halogen-free capacitors are also available.

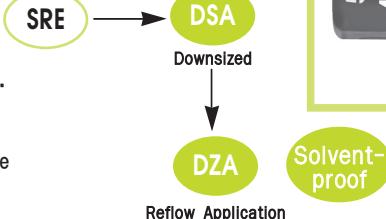

DZA Series

- Solvent proof.
- Height 5mm.
- Reflow Application.
- For CAR-Audio, Tuner.

- 85°C 2,000Hrs assured.

- RoHS compliant.
- Halogen-free capacitors are also available.

SPECIFICATIONS

Item	Characteristics																														
Rated Voltage Range	4 ~ 50 V _{DC}																														
Operating Temperature Range	- 40 ~ +85°C																														
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)																														
Leakage Current	I = 0.01CV(μA) or 3μA, whichever is greater. Where, I:Max. Leakage current(μA), C:Nominal capacitance(μF), V:Rated voltage(V _{DC}) (at 20°C, 2 minutes)																														
Dissipation Factor(Tan δ)	<table border="1"> <tr> <td>Rated Voltage(V_{DC})</td><td>4</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td></tr> <tr> <td>Tan δ(Max.)</td><td>0.38</td><td>0.35</td><td>0.32</td><td>0.30</td><td>0.18</td><td>0.14</td><td>0.12</td></tr> </table> (at 20°C, 120Hz)							Rated Voltage(V _{DC})	4	6.3	10	16	25	35	50	Tan δ(Max.)	0.38	0.35	0.32	0.30	0.18	0.14	0.12								
Rated Voltage(V _{DC})	4	6.3	10	16	25	35	50																								
Tan δ(Max.)	0.38	0.35	0.32	0.30	0.18	0.14	0.12																								
Temperature Characteristics (Max. Impedance ratio)	<table border="1"> <tr> <td>Rated Voltage(V_{DC})</td><td>4</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35~50</td><td></td></tr> <tr> <td>Z(-25°C)/Z(20°C)</td><td>7</td><td>4</td><td>3</td><td>2</td><td>2</td><td>2</td><td></td></tr> <tr> <td>Z(-40°C)/Z(20°C)</td><td>15</td><td>10</td><td>8</td><td>5</td><td>4</td><td>3</td><td></td></tr> </table> (at 120Hz)							Rated Voltage(V _{DC})	4	6.3	10	16	25	35~50		Z(-25°C)/Z(20°C)	7	4	3	2	2	2		Z(-40°C)/Z(20°C)	15	10	8	5	4	3	
Rated Voltage(V _{DC})	4	6.3	10	16	25	35~50																									
Z(-25°C)/Z(20°C)	7	4	3	2	2	2																									
Z(-40°C)/Z(20°C)	15	10	8	5	4	3																									
Load Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for 2,000 hours at 85°C. Capacitance change ≤ ±20% of the initial value Tan δ ≤ 200% of the initial specified value Leakage current ≤ The initial specified value																														
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 85°C without voltage applied. The rated voltage shall be applied to the capacitors for a minimum of 30 minutes, at least 24 hours and not more than 48 hours before the measurements. Capacitance change ≤ ±20% of the initial value Tan δ ≤ 200% of the initial specified value Leakage current ≤ 200% of the initial specified value																														
Others	Satisfied characteristics KS C IEC 60384-4																														

DIMENSIONS OF DSA/DZA

Unit(mm)

Ø D'	4	5	6.3	8
Ø d	0.45	0.45	0.45	0.45
F	1.5	2.0	2.5	2.5
Ø D'	Ø D + 0.5 max.			
L'	L + 1.0 max.		L + 1.5 max.	

The technical drawing provides detailed dimensions for the DSA and DZA series capacitors. The side view shows the total length L', the outer diameter Ø D', and the distance from the center of the terminals to the edge of the sleeve, labeled as F ± 0.5. The top-down views show the circular profile of the capacitor body with the same dimension F ± 0.5 indicated.

Marking- DSA : BLACK SLEEVE, WHITE INK
DZA : GREEN SLEEVE, BLACK INK

RATINGS OF DSA/DZA Series

μF	V _{DC}	4	6.3	10	16	25	35	50
1								4×5 8.6
2.2								4×5 11
3.3								4×5 14
4.7							4×5 15	4×5 17
6.8						4×5 17	4×5 18	5×5 22
10					4×5 20	4×5 21	5×5 25	5×5 27
15				4×5 22	4×5 24	5×5 28	5×5 31	6.3×5 36
22			4×5 24	4×5 27	5×5 32	5×5 35	6.3×5 40	6.3×5 45
33		4×5 23	4×5 30	5×5 35	5×5 40	6.3×5 45	6.3×5 50	8×5 61
47		4×5 28	4×5 36	5×5 43	6.3×5 50	6.3×5 59	8×5 65	
68		5×5 33	5×5 48	6.3×5 54	6.3×5 60	8×5 74		
100		5×5 48	6.3×5 60	6.3×5 72	6.3×5 77	8×5 90		
150		6.3×5 70	6.3×5 72	8×5 88				
220		6.3×5 79	8×5 93	8×5 98				
330		8×5 95	8×5 141					
					← Case Size Ø D × L (mm)			
					← Rated Ripple Current (mArms/85°C, 120Hz)			

RECOMMENDED REFLOW SOLDERING CONDITIONS(For DZA Series)

