


## NXW Series

• 105°C 6,000~10,000Hrs assured.

- Non-solvent proof.
- Low Impedance, High ripple
- For LED TV BLU Inverter, IP-Board, Adaptor, LED Lighting
- RoHS compliant.
- Halogen-free capacitors are also available.

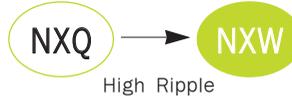


## SPECIFICATIONS

Item	Characteristics														
Rated Voltage Range	6.3 ~ 50 V <sub>DC</sub>														
Operating Temperature Range	-40 ~ +105°C														
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)														
Leakage Current	I = 0.01CV(μA) or 3μA, whichever is greater. Where, I : Max. Leakage current(μA), C : Nominal capacitance(μF), V : Rated voltage(V <sub>DC</sub> ) (at 20°C, 2minutes)														
Dissipation Factor(Tanδ)	<table border="1"> <tr> <td>Rated voltage(V<sub>DC</sub>)</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> </tr> <tr> <td>Tanδ(Max.)</td> <td>0.22</td> <td>0.19</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> </tr> </table> <p>Where the capacitance exceeds 1,000μF, 0.02 shall be added every 1,000μF increase (at 20°C, 120Hz)</p>	Rated voltage(V <sub>DC</sub> )	6.3	10	16	25	35	50	Tanδ(Max.)	0.22	0.19	0.16	0.14	0.12	0.10
Rated voltage(V <sub>DC</sub> )	6.3	10	16	25	35	50									
Tanδ(Max.)	0.22	0.19	0.16	0.14	0.12	0.10									
Temperature Characteristics (Max. Impedance ratio)	<table border="1"> <tr> <td>Z(-25°C)/Z(+20°C)</td> <td>2</td> </tr> <tr> <td>Z(-40°C)/Z(+20°C)</td> <td>3</td> </tr> </table> <p>(at 120Hz)</p>	Z(-25°C)/Z(+20°C)	2	Z(-40°C)/Z(+20°C)	3										
Z(-25°C)/Z(+20°C)	2														
Z(-40°C)/Z(+20°C)	3														
Load Life	<p>The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage with the rated ripple current is applied (the peak voltage shall not exceed the rated voltage) at 105°C for the specified period of time.</p> <table border="1"> <thead> <tr> <th>Case Size</th> <th>Life Time</th> </tr> </thead> <tbody> <tr> <td>φ5~φ6.3</td> <td>6,000hours</td> </tr> <tr> <td>φ8</td> <td>8,000hours</td> </tr> <tr> <td>φ10 X 12L~12.5L</td> <td>9,000hours</td> </tr> <tr> <td>φ10 X 16L~25L φ12.5~</td> <td>10,000hours</td> </tr> </tbody> </table> <p>Capacitance change ≤ ±30 % of the initial value tan δ ≤ 200 % of the initial specified value Leakage current ≤ The initial specified value</p>	Case Size	Life Time	φ5~φ6.3	6,000hours	φ8	8,000hours	φ10 X 12L~12.5L	9,000hours	φ10 X 16L~25L φ12.5~	10,000hours				
Case Size	Life Time														
φ5~φ6.3	6,000hours														
φ8	8,000hours														
φ10 X 12L~12.5L	9,000hours														
φ10 X 16L~25L φ12.5~	10,000hours														
Shelf Life	<p>The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 500 hours at 105°C without voltage applied. The rated voltage shall be applied to the capacitors for a minimum of 30 minutes, at least 24 hours and not more than 48 hours before the measurements.</p> <p>Capacitance change ≤ ±30 % of the initial value tan δ ≤ 200 % of the initial specified value Leakage current ≤ The initial specified value</p>														
Others	Satisfied characteristics KS C IEC 60384-4														

## DIMENSIONS OF NXW Series

Unit(mm)

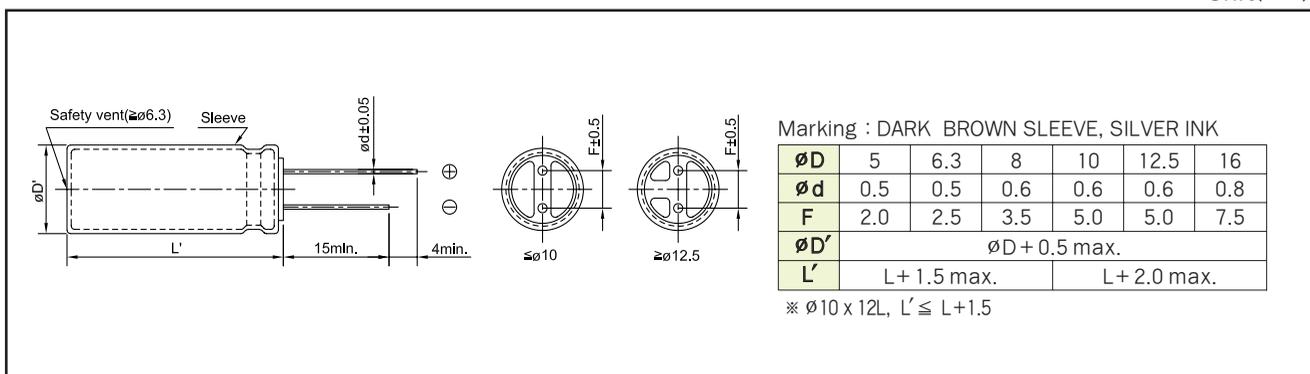

RATINGS OF NXW Series

∅D×L(mm)	V <sub>DC</sub>	6.3			10			16					
		μF	IMP.		Ripple	μF	IMP.		Ripple	μF	IMP.		Ripple
			20°C	-10°C			20°C	-10°C			20°C	-10°C	
5 × 11		220	0.34	1.11	380	150	0.34	1.11	495	120	0.34	1.11	495
6.3 × 11		470	0.14	0.47	594	330	0.14	0.47	770	270	0.14	0.47	770
8 × 11.5		820	0.064	0.21	1,040	560	0.064	0.21	1,320	470	0.064	0.21	1,320
8 × 15		1,000	0.050	0.16	1,375	680	0.050	0.16	1,760	560	0.050	0.16	1,760
8 × 20		1,500	0.035	0.11	1,650	1,000	0.035	0.11	2,156	820	0.035	0.11	2,156
10 × 12		1,200	0.045	0.14	1,620	820	0.045	0.14	1,836	680	0.045	0.14	1,836
10 × 12.5		1,200	0.045	0.14	1,620	820	0.045	0.14	1,836	680	0.045	0.14	1,836
10 × 16		1,800	0.032	0.10	1,901	1,200	0.032	0.10	2,160	1,000	0.032	0.10	2,160
10 × 20		2,700	0.024	0.074	2,117	1,800	0.024	0.074	2,700	1,500	0.024	0.074	2,700
10 × 25		3,300	0.020	0.063	2,430	2,200	0.020	0.063	3,132	1,800	0.020	0.063	3,132
12.5 × 20		3,900	0.021	0.066	2,678	2,700	0.021	0.066	2,808	2,200	0.021	0.066	2,808
12.5 × 25		4,700	0.016	0.050	3,132	3,300	0.016	0.050	3,294	2,700	0.016	0.050	3,294
12.5 × 30		5,600	0.015	0.047	3,726	4,700	0.015	0.047	3,780	3,300	0.015	0.047	3,780
12.5 × 35		6,800	0.014	0.042	3,856	5,600	0.014	0.042	3,888	3,900	0.014	0.042	3,888
16 × 20		6,800	0.018	0.055	3,413	4,700	0.018	0.055	3,413	3,300	0.018	0.055	3,413
16 × 25		8,200	0.014	0.045	3,812	5,600	0.014	0.045	3,812	4,700	0.014	0.045	3,812

∅D×L(mm)	V <sub>DC</sub>	25			35			50					
		μF	IMP.		Ripple	μF	IMP.		Ripple	μF	IMP.		Ripple
			20°C	-10°C			20°C	-10°C			20°C	-10°C	
5 × 11		68	0.34	1.11	495	47	0.34	1.11	495	27	0.43	1.39	341
6.3 × 11		150	0.14	0.47	770	100	0.14	0.47	770	56	0.20	0.64	550
8 × 11.5		330	0.064	0.21	1,320	180	0.064	0.21	1,320	100	0.11	0.36	1,045
8 × 15		390	0.050	0.16	1,760	220	0.050	0.16	1,760	120	0.074	0.24	1,353
8 × 20		560	0.035	0.11	2,156	330	0.035	0.11	2,156	180	0.053	0.17	1,738
10 × 12		470	0.045	0.14	1,836	270	0.045	0.14	1,836	150	0.062	0.19	1,382
10 × 12.5		470	0.045	0.14	1,836	270	0.045	0.14	1,836	150	0.062	0.19	1,382
10 × 16		680	0.032	0.10	2,160	390	0.032	0.10	2,160	220	0.045	0.14	1,782
10 × 20		1,000	0.024	0.074	2,700	560	0.024	0.074	2,700	330	0.032	0.10	2,305
10 × 25		1,200	0.020	0.063	3,132	680	0.020	0.063	3,132	390	0.027	0.08	2,419
12.5 × 20		1,500	0.021	0.066	2,808	820	0.021	0.066	2,808	470	0.027	0.08	2,376
12.5 × 25		1,800	0.016	0.050	3,294	1,200	0.016	0.050	3,294	680	0.021	0.066	2,700
12.5 × 30		2,200	0.015	0.047	3,780	1,500	0.015	0.047	3,780	820	0.020	0.061	3,348
12.5 × 35		2,700	0.014	0.042	3,888	1,800	0.014	0.042	3,888	1,000	0.018	0.055	3,510
16 × 20		2,200	0.018	0.055	3,413	1,500	0.018	0.055	3,413	820	0.022	0.069	2,867
16 × 25		3,300	0.014	0.045	3,812	1,800	0.014	0.045	3,812	1,000	0.019	0.058	3,161



RATED RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Freq.(Hz)	120	1k	10k	50k	100k
27 ~ 33	0.42	0.70	0.90	0.93	1.00
47 ~ 270	0.50	0.73	0.92	0.95	1.00
330 ~ 680	0.55	0.77	0.94	0.96	1.00
820 ~ 1,800	0.60	0.80	0.96	0.97	1.00
2,200 ~ 8,200	0.70	0.85	0.98	0.99	1.00