

reALcap™ AXA Series

- Super Low ESR, Large Capacitance.
- High Ripple Current.
- -55°C ~ + 105°C.
- Endurance 105°C, 2,000~5,000hrs.

ASA

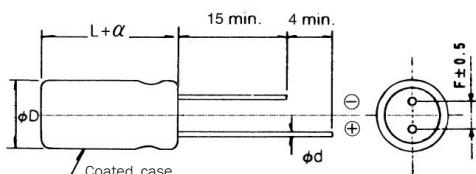
AXA

Low ESR


**SPECIFICATIONS**

Item	Characteristics												
Category temperature range	-55 to + 105°C												
Rated voltage range	4 to 25VDC												
Surge voltage	Rated Voltage(WV)	4	6.3	10	16	20	25						
	Surge Voltage(SV)	5.2	8.2	11.5	18.4	23	29						
Capacitance tolerance	±20%(M) (at 20°C, 120Hz)												
Tangent of loss angle	Shall not exceed the value in Ratings of AXA series. (at 20°C, 120Hz)												
Leakage Current * 1	Shall not exceed the value in Ratings of AXA series. (at 20°C, 2 minutes)												
ESR	Shall not exceed the value in Ratings of AXA series. (at 20°C, 100kHz)												
Impedance Ratio (Characteristics at low temp.)	Impedance	Ratio											
	Z(-25°C)/Z(+20°C)	≤ 1.15											
	Z(-55°C)/Z(+20°C)	≤ 1.25 (at 100kHz)											
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for the specified time at 105°C.												
	Capacitance change	≤ ±20% of the initial value											
	Tan δ	≤ 150% of the initial specified value											
	ESR	≤ 150% of the initial specified value											
	Leakage current	≤ The initial specified value											
Bias Humidity	The following specifications shall be satisfied when the capacitors are restored to 20°C after subjecting them to the DC rated voltage at 60°C, 90~95%RH for 1,000 hours.												
	Capacitance change	≤ ±20% of the initial value											
	Tan δ	≤ 150% of the initial specified value											
	ESR	≤ 150% of the initial specified value											
	Leakage current	≤ The initial specified value											
Size													
6.3×6													
8×7													
8×11.5													
10×12.5													
Time(Hrs)													
2,000Hrs													
5,000Hrs													

* 1. If any doubt arises, remeasure the leakage current after following voltage treatment.(Voltage treatment : Applying rated voltage for 120minutes at 105°C)

DIMENSIONS**Coating Case Type**

Unit(mm)			
Ø D(+0.5max.)	6.3	8.0	8.0
L	6.0	7.0	11.5
α	0.5		
Ø d(±0.05)	0.45	0.45	0.6
F(±0.5)	2.5	3.5	3.5
	5.0		

MARKING

Note 1 : 6.3WV is marked by 6V

RATED RIPPLE CURRENT MULTIPLIERS**Frequency Multipliers**

Freq.(Hz)	120 ≤ f < 1k	1k ≤ f < 10k	10k ≤ f < 100k	100k ≤ f < 500k
Factor	0.05	0.3	0.7	1



CONDUCTIVE POLYMER ALUMINUM SOLID CAPACITORS

RATINGS OF AXA Series

Case Size (Ø D × L) (mm)	Rated Voltage (V)	Rated Capacitance(µF)	ESR(mΩ) (at 100kHz)	Rated Ripple Current(mArms/ 105°C, 100kHz)	Tangent of loss angle	Leakage Current (µA)
6.3 × 6	4	330	20	2,700	0.10	264
	6.3	220	20	2,700	0.10	277
	6.3	330	20	2,700	0.10	416
	10	150	20	2,700	0.10	300
	10	180	20	2,700	0.10	360
	16	68	20	2,700	0.10	218
	16	100	20	2,700	0.10	320
	20	47	25	2,410	0.10	188
8 × 7	4	470	22	3,220	0.10	376
	6.3	390	22	3,220	0.10	491
	10	220	22	3,220	0.10	440
	10	270	22	3,220	0.10	540
	16	150	22	3,220	0.10	480
	20	68	25	3,020	0.10	272
	25	56	30	2,760	0.10	280
8 × 11.5	4	1,000	14	4,350	0.10	800
	6.3	820	14	4,350	0.10	1,033
	10	680	14	4,350	0.10	1,360
	16	270	14	4,350	0.10	864
	16	470	14	4,350	0.10	1,504
	16	560	14	4,350	0.10	1,792
	20	270	14	4,350	0.10	1,080
	25	220	16	4,070	0.10	1,100
10 × 12.5	4	1,800	14	5,160	0.10	1,440
	6.3	1,500	14	5,160	0.10	1,890
	10	1,200	14	5,160	0.10	2,400
	16	470	14	5,160	0.10	1,504
	16	680	14	5,160	0.10	2,176
	16	820	14	5,160	0.10	2,624
	20	470	14	5,160	0.10	1,880
	25	470	16	4,830	0.10	2,350