
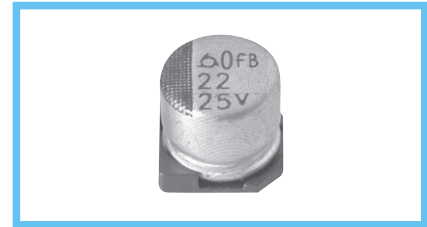


## BXA Series

• 105°C 1,000~2,000Hrs assured.

Solvent-proof

- Vertical SMD type.
- Low Impedance.
- For STB, Satellite Radio, Computer Server.
- RoHS compliant.
- Halogen-free capacitors are also available.




### SPECIFICATIONS

Item	Characteristics																					
Rated Voltage Range	6.3 ~ 50 V <sub>DC</sub>																					
Operating Temperature Range	-55 ~ +105°C																					
Capacitance Tolerance	±20%(M) <span style="float: right;">(at 20°C, 120Hz)</span>																					
Leakage Current	I = 0.01CV(μA) or 3μA, whichever is greater. Where, I: Max. Leakage current(μA), C: Nominal capacitance(μF), V: Rated voltage(V <sub>DC</sub> ) <span style="float: right;">(at 20°C, 2 minutes)</span>																					
Dissipation Factor(Tanδ)	<table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th style="text-align: left;">Rated Voltage(V<sub>DC</sub>) SIZE</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> </tr> </thead> <tbody> <tr> <td>D56~H63</td> <td>0.24</td> <td>0.20</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.12</td> </tr> <tr> <td>H10~J10</td> <td>0.28</td> <td>0.24</td> <td>0.20</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> </tr> </tbody> </table> <span style="float: right;">(at 20°C, 120Hz)</span>	Rated Voltage(V <sub>DC</sub> ) SIZE	6.3	10	16	25	35	50	D56~H63	0.24	0.20	0.16	0.14	0.12	0.12	H10~J10	0.28	0.24	0.20	0.16	0.14	0.12
Rated Voltage(V <sub>DC</sub> ) SIZE	6.3	10	16	25	35	50																
D56~H63	0.24	0.20	0.16	0.14	0.12	0.12																
H10~J10	0.28	0.24	0.20	0.16	0.14	0.12																
Temperature Characteristics (Max. Impedance ratio)	<table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th style="text-align: left;">Rated voltage(V<sub>DC</sub>)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> </tr> </thead> <tbody> <tr> <td>Z(-25°C)/Z(20°C)</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z(-55°C)/Z(20°C)</td> <td>5</td> <td>4</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> </tr> </tbody> </table> <span style="float: right;">(at 120Hz)</span>	Rated voltage(V <sub>DC</sub> )	6.3	10	16	25	35	50	Z(-25°C)/Z(20°C)	3	2	2	2	2	2	Z(-55°C)/Z(20°C)	5	4	4	3	3	3
Rated voltage(V <sub>DC</sub> )	6.3	10	16	25	35	50																
Z(-25°C)/Z(20°C)	3	2	2	2	2	2																
Z(-55°C)/Z(20°C)	5	4	4	3	3	3																
Load Life	<p>The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied with the following conditions.</p> <p>∅4~∅6.3 : 105°C, 1,000 hours, ∅8 &amp; ∅10 : 105°C, 2,000 hours.                      Capacitance change ≤ ±25% of the initial value                      Tanδ ≤ 200% of the initial specified value                      Leakage current ≤ The initial specified value</p>																					
Shelf Life	<p>The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1000 hours at 105°C without voltage applied. The rated voltage shall be applied to the capacitors for a minimum of 30 minutes, at least 24 hours and not more than 48 hours before the measurements.</p> <p>Capacitance change ≤ ±25% of the initial value                      Tanδ ≤ 200% of the initial specified value                      Leakage current ≤ The initial specified value</p>																					
Others	Satisfied characteristics KS C IEC 60384-4																					

BXA Series

### PART NUMBERING SYSTEM

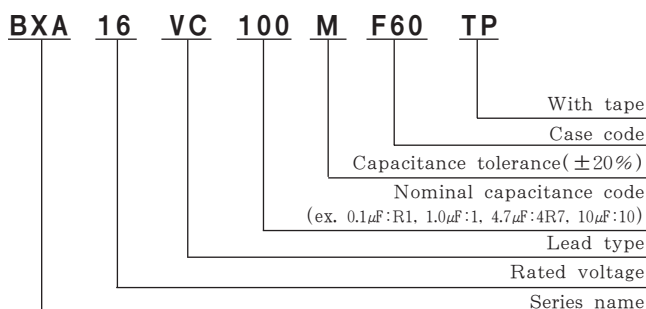

### RATED RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Cap.(μF)	Freq.(Hz)	120	1K	10K	100K
2.2 ~ 4.7		0.35	0.70	0.90	1.00
10 ~ 100		0.40	0.75	0.90	1.00
220 ~ 470		0.50	0.85	0.94	1.00
1,000 ~ 1,500		0.60	0.87	0.95	1.00

## DIMENSIONS OF BXA Series

Unit(mm)

### DIMENSIONS

Recommended solder land on PC board

: Solder land on PC board

### MARKING

Note 1 :  $L \pm 0.5$  for  $8 \times 6.3$ (H63)~ $10 \times 10$ (J10)  
 Note 2 :  $4 \times 5.3$ (D56),  $5 \times 5.3$ (E56) is excluded symbol mark.  
 Note 3 : 6.3WV is marked by 6V.

Case code	$\phi D$	L	A	B	C	W	P	a	b	c
D56	4	5.3	4.3	4.3	5.1	0.5~0.8	1.0	1.0	2.6	1.6
E56	5	5.3	5.3	5.3	5.9	0.5~0.8	1.4	1.4	3.0	1.6
F60	6.3	5.7	6.6	6.6	7.2	0.5~0.8	1.9	1.9	3.5	1.6
F80	6.3	7.7	6.6	6.6	7.2	0.5~0.8	1.9	1.9	3.5	1.6
H63	8	6.3	8.3	8.3	9.0	0.5~0.8	2.3	2.3	4.5	1.6
H10	8	10	8.3	8.3	9.0	0.7~1.1	3.1	3.1	4.2	2.2
J10	10	10	10.3	10.3	11.0	0.7~1.1	4.5	4.5	4.4	2.2

## RATINGS OF BXA Series

$\mu F$	$V_{DC}$	6.3			10			16			25			35			50		
		Case code	Rated Ripple Current (mA)	Impedance ( $\Omega$ )	Case code	Rated Ripple Current (mA)	Impedance ( $\Omega$ )	Case code	Rated Ripple Current (mA)	Impedance ( $\Omega$ )	Case code	Rated Ripple Current (mA)	Impedance ( $\Omega$ )	Case code	Rated Ripple Current (mA)	Impedance ( $\Omega$ )	Case code	Rated Ripple Current (mA)	Impedance ( $\Omega$ )
2.2																	D56	4.80	30
4.7														D56	2.10	80	E56	3.00	50
10										D56	2.10	80	E56	0.90	150	F60	2.00	70	
22					D56	2.10	80	E56	0.90	150	E56	0.90	150	E56	0.90	150	F60	2.00	70
33		D56	2.10	80	E56	0.90	150	F60	0.44	230	F60	0.44	230	F60	0.44	230	F80	1.00	170
47		E56	0.90	150	F60	0.44	230	F60	0.44	230	F60	0.44	230	F60	0.44	230	H63	0.90	180
68		F60	0.44	230	F60	0.44	230	F60	0.44	230	F60	0.44	230	F80	0.34	280	H10	0.44	230
100		F60	0.44	230	F60	0.44	230	F60	0.44	230	F80	0.34	280	H10	0.17	450	H10	0.44	230
	H63										0.32	300							
220		F60	0.44	230	F80	0.34	280	F80	0.34	280	H10	0.17	450	H10	0.17	450	J10	0.30	350
330		F80	0.34	280	H10	0.17	450	H10	0.17	450	H10	0.17	450	J10	0.09	670			
470		H10	0.17	450	H10	0.17	450	H10	0.17	450	J10	0.09	670						
1,000		H10	0.17	450	J10	0.09	670												
1,500		J10	0.09	670															

Rated Ripple Current (mA/105°C, 100kHz)  
 Impedance ( $\Omega$  max./20°C, 100kHz)  
 Case code