
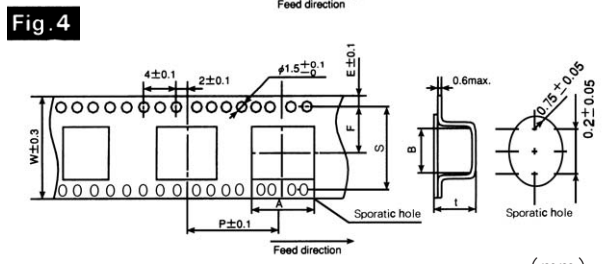
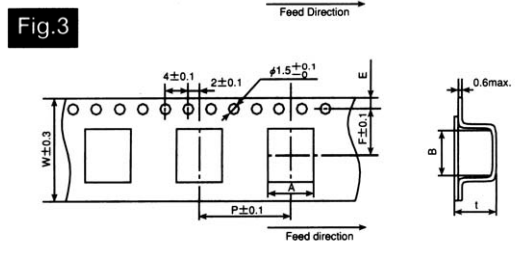
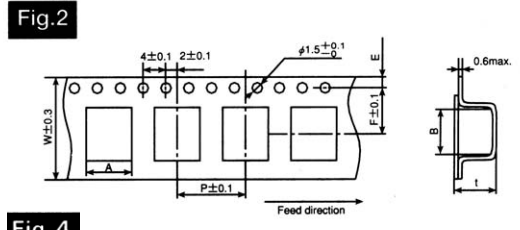


DETAIL SPECIFICATIONS OF TAPING METHOD


■ SURFACE MOUNT TYPE TAPING DIMENSIONS

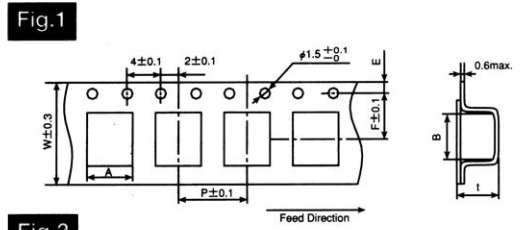

(mm)

Series	Case Code	Fig	W	A	B	F	E	P	t	S
AL CHIP reALcap™	∅ 3(B55)	1	12	3.5±0.2	3.5±0.2	5.5	1.75±0.1	8	5.9±0.2	-
	∅4(D55,D56,D60)	1	12	4.7±0.2	4.7±0.2	5.5	1.75±0.1	8	5.7±0.2(D55,D56) 6.3±0.2(D60)	-
	∅ 5(E55,E56,E60)	2	12	5.7±0.2	5.7±0.2	5.5	1.75±0.1	12	5.7±0.2(E55,E56) 6.3±0.2(E60)	-
	∅ 6.3(F55,F56,F60)	2	16	7.0±0.2	7.0±0.2	7.5	1.75±0.1	12	5.7±0.2(F55,F56) 6.3±0.3(F60)	-
	∅ 6.3 × 8L(F80)	2	16	7.0±0.2	7.0±0.2	7.5	1.75±0.1	12	8.2±0.2	-
	∅ 8 × 6L(H63)	2	16	8.7±0.2	8.7±0.2	7.5	1.75±0.1	12	6.8±0.2	-
	∅ 8 × 6.7L(H70)	2	24	8.7±0.2	8.7±0.2	11.5	1.75±0.1	12	7.3±0.2	-
	∅ 8 × 10L(H10)	3	24	8.7±0.2	8.7±0.2	11.5	1.75±0.1	16	11.0±0.2	-
	∅ 8 × 11.5L(H12)	3	24	8.7±0.2	8.7±0.2	11.5	1.75±0.1	16	12.3±0.2	-
	∅ 10 × 10L(J10)	3	24	10.7±0.2	10.7±0.2	11.5	1.75±0.1	16	11.0±0.2	-
	∅ 10 × 12.2L(J12)	3	24	10.7±0.2	10.7±0.2	11.5	1.75±0.1	16	13.0±0.2	-
∅ 12.5 × 13.5L(K14)	4	32	13.4±0.2	13.4±0.2	14.2	1.75±0.1	24	14.0±0.2	28.4±0.1	


REEL




QUANTITY PER REEL

Series	Case Code	W(mm)	Q'ty(pcs/reel)	Q'ty(pcs/box)
AL CHIP reALcap™	∅ 3(B55)	14	2,000	20,000
	∅ 4(D55,D56,D60)	14	2,000	20,000
	∅ 5(E55,E56,E60)	14	1,000	10,000
	∅ 6.3(F55,F56,F60)	18	1,000	10,000
	∅ 6.3 × 8L(F80)	18	900	9,000
	∅ 8 × 6L(H63)	18	1,000	10,000
	∅ 8 × 6.7L(H70)	26	1,000	6,000
	∅ 8 × 10L(H10)	26	500	3,000
	∅ 8 × 11.5L(H12)	26	400	2,400
	∅ 10 × 10L(J10)	26	500	3,000
	∅ 10 × 12.2L(J12)	26	400	2,400
∅ 12.5 × 13.5L(K14)	34	200	1,000	

ORIENTATION OF POLARITY

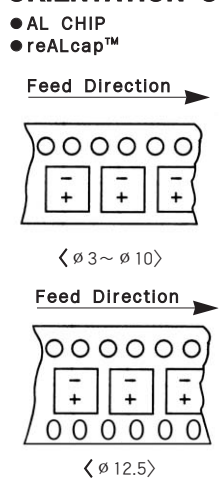

■ SURFACE MOUNT TYPE(TRAY)







QUANTITY PER TRAY/BOX

Case Code	H (mm)	W1 (mm)	H1 (mm)	Q'ty (pcs/tray)	Q'ty (pcs/box)
L17~L22	28.0	284	24.0	80	160,400
M17~M22	28.0	284	24.0	60	120,300

■ MINIATURE TYPE

Unit(mm)

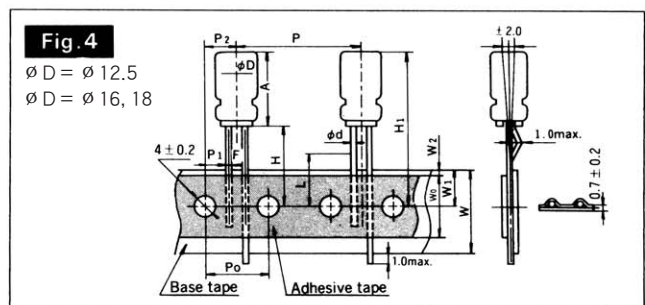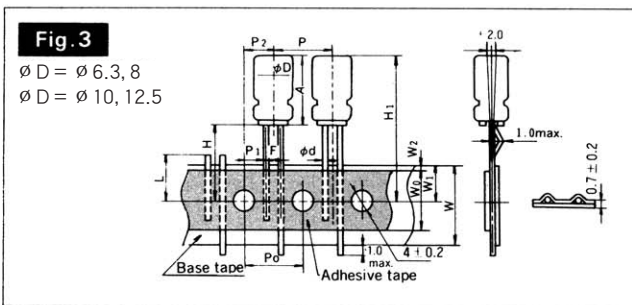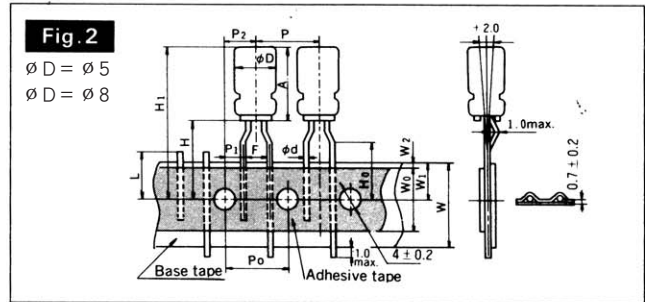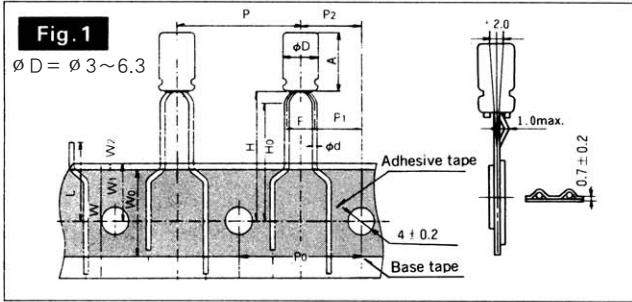

Code	Case size		ϕd	P	P0	P1	P2	F	W	W0	W1	W2	H	H0	H1	L	Fig		
	ϕD	A																	
Tol.	± 0.5	+1.0	± 0.05	± 1.0	± 0.2	± 0.7	± 1.0	+0.8 -0.2	± 0.5	min.	± 0.5	max.	± 0.75	± 0.5	-	max.			
Nominal	3	5	0.4	12.7	12.7	5.1 3.85	6.35	2.5 5	18.0	6	9.0	1.5	18.2 17.5	- 16.0	Check insertion machine specs.	11.0	1 2		
	3.5	5	0.4	12.7	12.7	5.1 3.85	6.35	2.5 5	18.0	6	9.0	1.5	18.2 17.5	- 16.0		11.0	1 2		
	4	5~7	0.45	12.7	12.7	5.1 3.85	6.35	2.5 5	18.0	6	9.0	1.5	18.2 17.5	- 16.0		11.0	1 2		
	5	5~7	0.45	12.7	12.7	5.1 3.85	6.35	2.5 5	18.0	6	9.0	1.5	18.2 17.5	- 16.0		11.0	1 2		
		11~15	0.5	12.7	12.7	5.1 3.85	6.35	2.5 5	18.0	10	9.0	1.5	18.5 16.0			11.0	2		
	6.3	5~7	0.45	12.7	12.7	5.1 3.85	6.35	2.5 5	18.0	6	9.0	1.5	18.2 17.5	- 16.0		11.0	1 2		
		9~15	0.5	12.7	12.7	5.1 3.85	6.35	2.5 5	18.0	10	9.0	1.5	18.5 16.0			11.0	3 2		
	8	* 5	0.45	12.7	12.7	5.1 3.85	6.35	2.5 5	18.0	6	9.0	1.5	18.2 17.5	- 16.0		11.0	3 2		
		7	0.45	12.7	12.7	5.1 3.85	6.35	3.5 5	18.0	10	9.0	1.5	18.5 20	- 16.0		11.0	3 2		
		9~20	0.6	12.7	12.7	5.1 3.85	6.35	3.5 5	18.0	10	9.0	1.5	18.2 18.5	- 16.0		11.0	3 2		
	Tol.	± 0.5	max.	± 0.05	± 1.0	± 0.3	± 0.7	± 1.3		± 0.5	min.	± 0.5	max.	± 0.75		-		max.	
	Nominal	10	27	0.6	12.7	12.7	3.85	6.35	5	18.0	12.5	9.0	1.5	18.5		-		11.0	3
12.5		27	0.6	15	15	5.0	7.5	5	18.0	12.5	9.0	1.5	18.5	-		11.0	3		
			0.6	25.4	12.7	3.85	6.35	5	18.0	12.5	9.0	1.5	18.5	-		11.0	4		
16		37.5	0.8	30	15	3.75	7.5	7.5	18.0	12.5	9.0	3.0	18~20	-		11.0	4		
18	37.5	0.8	30	15	3.75	7.5	7.5	18.0	12.5	9.0	3.0	18~20	-		11.0	4			

● P=25.4 taping is not standard. Use P=15 taping.

* $\phi 8 \times 5L(\text{Height})$ is 6.5mm max.