


BDA Series

• 105°C 2,000Hrs assured.

Solvent-proof

- Vertical SMD type.
- Long life of BDS(MVK) Series.
- For LCD MT/TV, Copying Machine
- RoHS compliant.
- Halogen-free capacitors are also available.

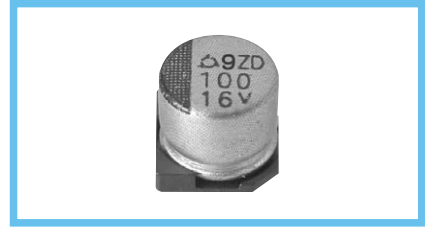


SPECIFICATIONS

Item	Characteristics								
Rated Voltage Range	4 ~ 50 V _{DC}								
Operating Temperature Range	-40 ~ +105°C								
Capacitance Tolerance	±20%(M) (at 20°C, 120Hz)								
Leakage Current	I = 0.01CV(μA) or 3μA, whichever is greater. Where, I:Max. Leakage current(μA), C:Nominal capacitance(μF), V:Rated voltage(V _{DC}) (at 20°C, 2 minutes)								
Dissipation Factor Tanδ(Max.)	Rated voltage(V _{DC})	4	6.3	10	16	25	35	50	(at 20°C, 120Hz)
	Tanδ(Max.)	0.37	0.28	0.24	0.20	0.16	0.13	0.12	
Temperature Characteristics (Max. Impedance ratio)	Rated voltage(V _{DC})	4	6.3	10	16	25~50		(at 120Hz)	
	Z(-25°C)/Z(20°C)	6	3	3	2	2			
	Z(-40°C)/Z(20°C)	12	8	5	4	3			
Load Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied for 2,000 hours at 105°C.								
	Rated voltage(V _{DC})	4 ~ 16V _{DC}			25 ~ 50V _{DC}				
	Capacitance change	≤ ±25% of the initial value			≤ ±20% of the initial value				
	Tanδ	≤ 200% of the initial specified value							
	Leakage current	≤ The initial specified value							
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied. The rated voltage shall be applied to the capacitors for a minimum of 30 minutes, at least 24 hours and not more than 48 hours before the measurements.								
	Rated voltage(V _{DC})	4 ~ 16V _{DC}			25 ~ 50V _{DC}				
	Capacitance change	≤ ±25% of the initial value			≤ ±20% of the initial value				
	Tanδ	≤ 200% of the initial specified value							
	Leakage current	≤ The initial specified value							
Others	Satisfied characteristics KS C IEC 60384-4								

BDA Series

PART NUMBERING SYSTEM

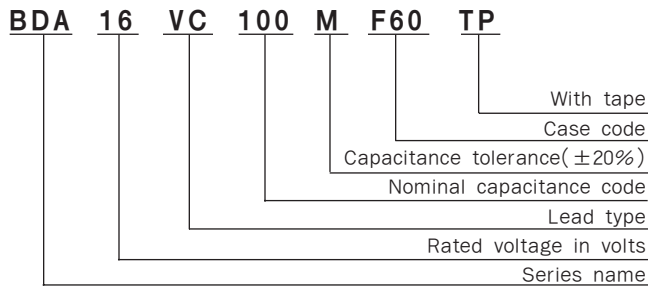

Capacitance	Code
0.1μF	R1
0.47μF	R47
1.0μF	1
4.7μF	4R7
10μF	10
100μF	100



SURFACE MOUNT ALUMINUM ELECTROLYTIC CAPACITORS

DIMENSIONS OF BDA Series (Type : VC)

Unit(mm)

DIMENSIONS

MARKING

Note 1 : 4×5.2(D55), 5×5.2(E55) is excluded symbol mark
 Note 2 : 6.3WV is marked by 6V

Case code	∅ D	L	A	B	C	W	P	a	b	c
D55	4	5.2	4.3	4.3	5.1	0.5-0.8	1.0	1.0	2.6	1.6
E55	5	5.2	5.3	5.3	5.9	0.5-0.8	1.4	1.4	3.0	1.6
F55	6.3	5.2	6.6	6.6	7.2	0.5-0.8	1.9	1.9	3.5	1.6
F60	6.3	5.7	6.6	6.6	7.2	0.5-0.8	1.9	1.9	3.5	1.6

Recommended solder land on PC board

▨ : Solder land on PC board

RATINGS OF BDA Series

Vdc μF	4		6.3		10		16		25		35		50		
	0.1													D55	1.3
0.22														D55	2.6
0.33														D55	3.2
0.47														D55	3.8
1														D55	5.6
2.2														D55	10
3.3														D55	14
4.7									D55	13	D55	15	E55	19	
10							D55	16	E55	25	E55	25	F55	29	
22	D55	19	D55	21	E55	30	E55	30	F55	40	F55	40			
33	E55	30	E55	34	E55	34	F55	45	F55	45					
47	E55	34	E55	36	F55	48	F55	48	F60	52					
100	E55	45	F60	56	F60	90	F60	110							

