
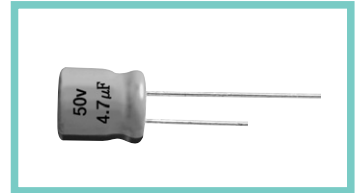


## SRA-LL(GSA-LL) Series

• 85°C 2,000Hrs assured.



- Non-solvent proof.
- Height 7mm.
- Low leakage current.
- For CAR-Audio
- RoHS compliant.

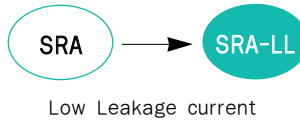

## LL Series

• 85°C 2,000Hrs assured.

- Non-solvent proof.
- Very low leakage current.
- For CAR-Audio
- RoHS compliant.

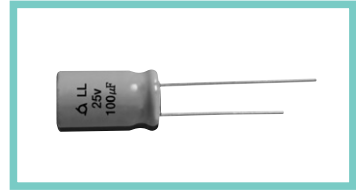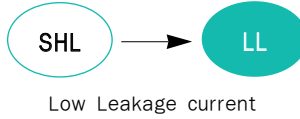


## SPECIFICATIONS

Item	Characteristics								
Rated Voltage Range	6.3 ~ 100 V <sub>DC</sub>								
Operating Temperature Range	-40 ~ +85°C								
Capacitance Tolerance	±20% (M) (at 20°C)								
Leakage Current(Max.)	SRA-LL Series : I=0.004V(µA) or 0.4µA, whichever is greater. LL Series : I=0.002CV(µA) or 0.2µA, whichever is greater. Where, I:Max. leakage current(µA), C:Nominal capacitance(µF), V:Rated voltage(V <sub>DC</sub> ) (at 20°C, 2 minutes)								
Dissipation Factor (Tanδ)	Rated Voltage(V <sub>DC</sub> )	6.3	10	16	25	35	50~63	100	(at 20°C, 120Hz)
	Tan δ(Max.)	0.24	0.20	0.16	0.14	0.12	0.10	0.07	
Temperature Characteristics (Max. Impedance ratio)	Rated Voltage(V <sub>DC</sub> )	SRA-LL Series		LL Series					(at 120Hz)
		—		6.3	10	16	25	35~100	
	Z(-25°C)/Z(+20°C)	4		4	3	2	2	2	
	Z(-40°C)/Z(+20°C)	8		8	6	4	3	3	
Load Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for 2,000 hours at 85°C. Capacitance change ≤ ±20% of the initial value Tanδ ≤ 200% of the initial specified value Leakage current ≤ The initial specified value								
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 500 hours at 85°C without voltage applied. The rated voltage shall be applied to the capacitors for a minimum of 30 minutes, at least 24 hours and not more than 48 hours before the measurement. Capacitance change ≤ ±20% of the initial value Tanδ ≤ 200% of the initial specified value Leakage current ≤ The initial specified value								
Others	Satisfied characteristics W of KS C 6421								


## DIMENSIONS OF SRA-LL Series

Unit (mm)

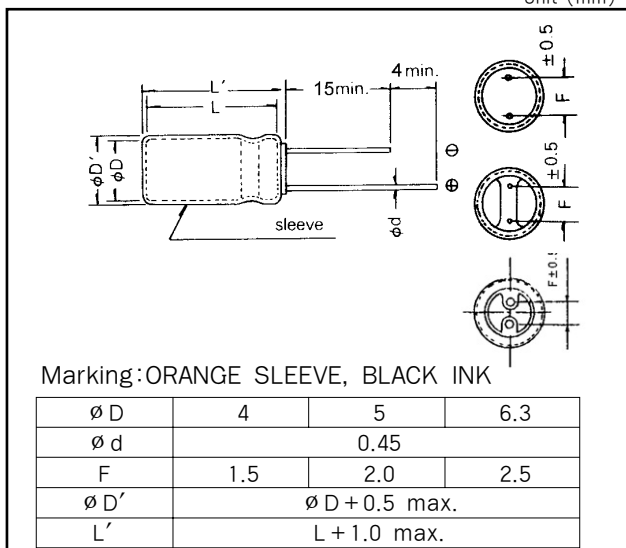

## DIMENSIONS OF LL Series

Unit (mm)

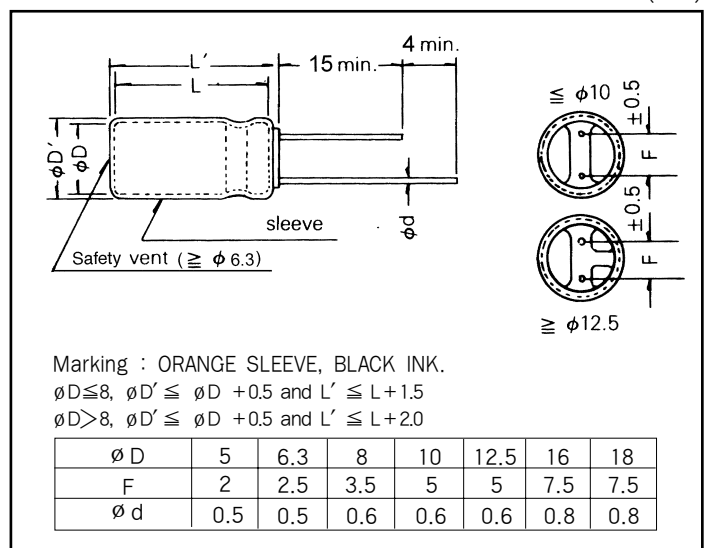



# MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

## RATINGS OF SRA-LL Series

μF \ V <sub>DC</sub>	6.3(0J)		10(1A)		16(1C)		25(1E)		35(1V)		50(1H)	
	μF	V <sub>DC</sub>	μF	V <sub>DC</sub>	μF	V <sub>DC</sub>	μF	V <sub>DC</sub>	μF	V <sub>DC</sub>	μF	V <sub>DC</sub>
0.1					4×7	1.0					4×7	1.5
0.15					4×7	1.5					4×7	2.0
0.22					4×7	2.0					4×7	3.1
0.33					4×7	3.1					4×7	3.7
0.47					4×7	4.2					4×7	5.2
0.68					4×7	6.8					4×7	7.3
1					4×7	9.2					4×7	12
1.5					4×7	11					4×7	14
2.2					4×7	12					4×7	17
3.3					4×7	15	4×7	17	4×7	18	5×7	21
4.7					4×7	20	4×7	21	5×7	22	6.3×7	25
6.8					5×7	23	5×7	25	6.3×7	28	6.3×7	31
10			4×7	25	5×7	27	5×7	30	6.3×7	33	6.3×7	40
15	4×7	28	5×7	30	6.3×7	33	6.3×7	37	6.3×7	39		
22	5×7	33	5×7	37	6.3×7	42	6.3×7	45	6.3×7	49		
33	5×7	41	6.3×7	45	6.3×7	52	6.3×7	55				
47	6.3×7	49	6.3×7	55	6.3×7	62						
68	6.3×7	59	6.3×7	65								
100	6.3×7	73										

Rated Ripple Current (mArms/85°C, 120Hz)  

 Case Size  $\phi$ D × L (mm)

## RATINGS OF LL Series

μF \ V <sub>DC</sub>	6.3(0J)		10(1A)		16(1C)		25(1E)		35(1V)		50(1H)		63(1J)		100(2A)	
	μF	V <sub>DC</sub>	μF	V <sub>DC</sub>	μF	V <sub>DC</sub>	μF	V <sub>DC</sub>	μF	V <sub>DC</sub>	μF	V <sub>DC</sub>	μF	V <sub>DC</sub>	μF	V <sub>DC</sub>
0.1											5×11	5			5×11	6
0.22											5×11	7			5×11	9
0.33											5×11	9			5×11	11
0.47											5×11	11			5×11	13
1											5×11	16			5×11	19
2.2											5×11	23			6.3×11	31
3.3											5×11	28			8×11.5	44
4.7							5×11	28	5×11	31	6.3×11	38			8×11.5	52
10					5×11	39	6.3×11	47	6.3×11	51	8×11.5	64	8×11.5	64	10×16	100
22			5×11	51	6.3×11	66	8×11.5	80	8×11.5	87	10×12.5	112	10×16	124	10×20	160
33			6.3×11	72	6.3×11	80	8×11.5	98	10×12.5	125	10×16	151	10×16	151	12.5×20	217
47			6.3×11	86	8×11.5	110	10×12.5	138	10×12.5	149	10×16	181	10×20	196	12.5×25	282
100			8×11.5	143	10×12.5	189	10×16	223	10×20	260	12.5×20	316	12.5×25	344	16×25	455
220	10×12.5	229	10×16	276	10×20	335	12.5×20	397	12.5×25	466	16×25	564	16×31.5	607	18×35.5	775
330	10×16	309	10×20	367	12.5×20	454	12.5×25	528	12.5×25	631	16×31.5	744	16×35.5	761	18×40	964
470	10×20	399	12.5×20	485	12.5×20	542	16×25	697	16×25	753	16×35.5	908	18×35.5	948		
1,000	12.5×25	702	12.5×25	769	16×25	951	18×35.5	1,120	16×25	1,262	18×40	1,404				
2,200	16×25	1,107	16×31.5	1,295	18×35.5	1,529	18×40	1,647								
3,300	16×35.5	1,438	16×35.5	1,554	18×40	1,804										
4,700	18×35.5	1,676	18×40	1,820												

Rated Ripple Current (mArms/85°C, 120Hz)  

 Case Size  $\phi$ D × L (mm)