


NBA Series

• 105°C 3,000~5,000Hrs assured.

- Non-solvent proof.
- High Ripple, Long Life, Low Temp.
- For SMPS, IP-Board, Adaptor, LED Lighting.
- RoHS compliant.
- Halogen-free capacitors are also available.
- AEC-Q200 compliant : Please contact us for more details, test data, information.

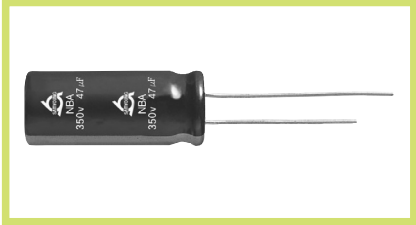

SPECIFICATIONS

Item	Characteristics									
Rated Voltage Range	160~500 V _{DC}									
Operating Temperature Range	-40 ~ +105°C									
Capacitance Tolerance	±20%(M) (at 20°C, 120Hz)									
Leakage Current	<table border="1"> <thead> <tr> <th>C · V \ Time</th> <th>After 1 minute</th> <th>After 5 minutes</th> </tr> </thead> <tbody> <tr> <td>≤ 1000</td> <td>I = 0.1CV + 40</td> <td>I = 0.03CV + 15</td> </tr> <tr> <td>> 1000</td> <td>I = 0.04CV + 100</td> <td>I = 0.02CV + 25</td> </tr> </tbody> </table> <p>Where, I:Max. Leakage current(μA) C:Nominal capacitance(μF) V:Rated voltage(V_{DC}) (at 20°C)</p>	C · V \ Time	After 1 minute	After 5 minutes	≤ 1000	I = 0.1CV + 40	I = 0.03CV + 15	> 1000	I = 0.04CV + 100	I = 0.02CV + 25
C · V \ Time	After 1 minute	After 5 minutes								
≤ 1000	I = 0.1CV + 40	I = 0.03CV + 15								
> 1000	I = 0.04CV + 100	I = 0.02CV + 25								
Dissipation Factor(Tanδ)	<table border="1"> <thead> <tr> <th>Rated Voltage(V_{DC})</th> <th>160~250</th> <th>350~500</th> </tr> </thead> <tbody> <tr> <td>Tanδ(Max.)</td> <td>0.20</td> <td>0.24</td> </tr> </tbody> </table> <p>(at 20°C, 120Hz)</p>	Rated Voltage(V _{DC})	160~250	350~500	Tanδ(Max.)	0.20	0.24			
Rated Voltage(V _{DC})	160~250	350~500								
Tanδ(Max.)	0.20	0.24								
Temperature Characteristics (Max. Impedance ratio)	<table border="1"> <thead> <tr> <th>Rated Voltage(V_{DC})</th> <th>160~500</th> </tr> </thead> <tbody> <tr> <td>Z(-25°C)/Z(20°C)</td> <td>3</td> </tr> <tr> <td>Z(-40°C)/Z(20°C)</td> <td>6</td> </tr> </tbody> </table> <p>(at 120Hz)</p>	Rated Voltage(V _{DC})	160~500	Z(-25°C)/Z(20°C)	3	Z(-40°C)/Z(20°C)	6			
Rated Voltage(V _{DC})	160~500									
Z(-25°C)/Z(20°C)	3									
Z(-40°C)/Z(20°C)	6									
Load Life	<p>The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage with the rated ripple current is applied (the peak voltage shall not exceed the rated voltage) for 5,000 hours at 105°C. (where 3,000hour for Ø6.3)</p> <p>Capacitance change ≤ ±20% of the initial value Tanδ ≤ 200% of the initial specified value Leakage current ≤ The initial specified value</p>									
Shelf Life	<p>The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied. The rated voltage shall be applied to the capacitors for a minimum of 30 minutes, at least 24 hours and not more than 48 hours before the measurements.</p> <p>Capacitance change ≤ ±20% of the initial value Tanδ ≤ 200% of the initial specified value Leakage current ≤ 500% of the initial specified value</p>									
Others	Satisfied characteristics KS C IEC 60384-4									

DIMENSIONS OF NBA Series

Unit(mm)

Marking : DARK BLUE SLEEVE, SILVER INK

ØD	6.3	8	10	12.5	16	18	20	22	25.4
Ød	0.5	0.6	0.6	0.6	0.8	0.8	0.8	1.0	1.0
F	2.5	3.5	5.0	5.0	7.5	7.5	7.5	10.0	10.0
ØD'	ØD + 0.5 max.								
L'	L + 1.5 max.				L + 2.0 max.				

※ Ø10 x 12L, L' ≤ L + 1.5

RATINGS OF NBA Series

V _{dc}	Capacitance (μF)	∅D×L(mm)	Rated Ripple Current (mA _{rms} /105°C, 120Hz)
160	6.8	8 × 11.5	90
	8.2	5 × 15	85
	10	6.3 × 15	106
	15	8 × 15	121
	15	8 × 15	148
	22	10 × 10	205
		10 × 12	221
		10 × 12.5	221
		10 × 16	243
	27	10 × 12	240
		10 × 12.5	240
		10 × 16	264
	33	10 × 16	270
	39	10 × 16	292
	47	10 × 20	369
	68	10 × 20	400
	82	10 × 25	455
		12.5 × 20	495
	100	12.5 × 20	561
	120	10 × 33	638
		12.5 × 25	638
	150	16 × 25	825
	180	16 × 25	891
	220	16 × 31.5	968
		18 × 25	968
	270	16 × 35.5	1100
	330	16 × 40	1256
		18 × 31.5	1231
		22 × 25	1200
	390	22 × 30	1380
470	18 × 40	1541	
	25.4 × 30	1630	
560	22 × 35	1750	
	22 × 40	1830	
680	22 × 45	2110	
	25.4 × 35	2060	
820	22 × 50	2400	
	25.4 × 40	2370	
1000	25.4 × 50	2830	
200	4.7	8 × 11.5	77
	8.2	6.3 × 15	101
	10	8 × 11.5	113
	10	8 × 20	140
	15	8 × 15	148
	22	10 × 12	221
		10 × 12.5	221
		10 × 16	243
	27	10 × 16	264
	33	10 × 20	308
	39	10 × 20	336
	47	10 × 20	369
		12.5 × 20	440
	68	12.5 × 20	492
		12.5 × 25	594
	82	12.5 × 25	616
		16 × 20	616
	100	12.5 × 30	700
		16 × 25	717
	120	12.5 × 35	815
		16 × 25	785
	150	16 × 25	836
	180	16 × 31.5	935
	220	18 × 31.5	1100
		22 × 25	1100
	270	18 × 35.5	1265
		18 × 40	1375
	330	22 × 30	1190
		22 × 35	1360
	390	25.4 × 30	1380
22 × 40		1570	
470	25.4 × 35	1600	
	22 × 45	1780	
560	22 × 50	1850	
	25.4 × 40	1830	
820	25.4 × 50	2390	

V _{dc}	Capacitance (μF)	∅D×L(mm)	Rated Ripple Current (mA _{rms} /105°C, 120Hz)
250	4.7	8 × 15	80
	6.8	8 × 20	106
		10 × 12	119
		10 × 12.5	119
	10	10 × 12	160
		10 × 12.5	160
	15	10 × 12	174
		10 × 12.5	174
	22	10 × 16	230
	27	10 × 20	270
	33	12.5 × 20	323
	39	12.5 × 20	354
	47	12.5 × 20	440
	68	12.5 × 25	594
	82	12.5 × 30	660
	100	16 × 25	717
	120	16 × 25	785
	150	18 × 25	902
	180	18 × 31.5	1012
		22 × 25	900
	220	18 × 31.5	1100
		22 × 30	1060
	270	22 × 35	1240
		25.4 × 30	1260
	330	22 × 40	1440
		25.4 × 35	1460
	390	22 × 45	1620
		25.4 × 40	1660
	470	22 × 50	1860
	560	25.4 × 50	2160
350	4.7	8 × 11.5	93
	6.8	8 × 15	101
	10	10 × 12	153
		10 × 12.5	153
		10 × 16	158
	15	10 × 20	197
	22	12.5 × 20	297
	27	12.5 × 20	314
	33	12.5 × 20	319
	39	12.5 × 25	352
	47	12.5 × 30	451
	68	16 × 25	605
	82	18 × 25	688
	100	18 × 31.5	817
		22 × 25	800
	120	18 × 35.5	924
		22 × 30	930
	150	18 × 35.5	1036
		25.4 × 30	1110
	180	18 × 40	1155
		22 × 35	1200
	200	22 × 40	1330
		25.4 × 35	1350
	220	22 × 45	1450
		22 × 50	1670
	270	25.4 × 40	1650
		25.4 × 50	1970

RATED RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Cap.(μF) \ Freq.(Hz)	120	1K	10K	50K	100K
1 ~ 82	1.00	1.75	2.25	2.35	2.50
100 ~ 1000	1.00	1.67	2.05	2.15	2.25

MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS



RATINGS OF NBA Series

V _{DC}	Capacitance (μF)	ØD × L(mm)	Rated Ripple Current (mA _{rms} /105°C, 120Hz)
400	1	6.3 × 11	22
	1.5	6.3 × 15	32
		8 × 11.5	34
	2.2	8 × 11.5	41
	3.3	8 × 11.5	50
	4.7	8 × 11.5	60
	6.8	8 × 15	94
	8.2	8 × 20	119 (400 / 100kHz)
		10 × 12	132
		10 × 12.5	132
	10	10 × 16	145
	22	12.5 × 20	297
	27	12.5 × 20	314
	33	12.5 × 25	343
	39	12.5 × 25	352
		12.5 × 30	378
	47	12.5 × 35	462
		16 × 25	480
	68	12.5 × 40	550
		18 × 25	627
	82	18 × 31.5	770
		22 × 25	710
	100	18 × 31.5	817
		18 × 35.5	875
	120	18 × 35.5	924
		18 × 40	1003
		22 × 30	910
150	18 × 40	1122	
	22 × 35	1170	
	25.4 × 30	1180	
180	18 × 45	1188	
	20 × 40	1188	
	22 × 40	1230	
	25.4 × 35	1250	
200	22 × 45	1360	
220	22 × 50	1480	
	25.4 × 40	1460	
270	25.4 × 50	1750	
330	25.4 × 50	1810	
420	1	6.3 × 11	17
	1.5	6.3 × 15	24
		8 × 11.5	26
	2.2	8 × 11.5	30
	3.3	8 × 11.5	37
	4.7	8 × 11.5	44
	6.8	8 × 20	105
	8.2	10 × 16	113
	10	10 × 20	135
	22	12.5 × 20	225
	27	12.5 × 20	254
	33	12.5 × 30	340
		16 × 20	345
	39	12.5 × 35	380
		16 × 25	400
	47	12.5 × 40	450
		16 × 25	450
	68	18 × 25	520
		18 × 31.5	580
	82	18 × 25	600
		18 × 31.5	650
		22 × 25	630
	100	16 × 45	770
		18 × 35.5	770
		22 × 30	740
	120	16 × 50	850
		18 × 40	850
22 × 35		860	
25.4 × 30		870	
150	18 × 45	1000	
	20 × 40	1000	
	22 × 40	1000	
	25.4 × 35	1020	
180	22 × 45	1150	
200	25.4 × 40	1240	
220	22 × 50	1320	
270	25.4 × 50	1560	

V _{DC}	Capacitance (μF)	ØD × L(mm)	Rated Ripple Current (mA _{rms} /105°C, 120Hz)
450	1	6.3 × 11	17
	1.5	6.3 × 15	24
		8 × 11.5	26
	2.2	8 × 15	33
	3.3	8 × 11.5	37
	4.7	10 × 12	76
		10 × 12.5	76
	6.8	8 × 20	105
		10 × 12	90 (350 / 100kHz)
	8.2	8 × 20	110 (400 / 100kHz)
		10 × 16	113
	10	10 × 20	135
	22	12.5 × 25	250
	27	12.5 × 25	265
	33	12.5 × 30	340
		16 × 20	345
	39	12.5 × 35	380
		16 × 25	400
	47	12.5 × 40	450
		16 × 25	450
	68	18 × 25	560
		18 × 31.5	590
	82	22 × 25	560
		16 × 40	650
		18 × 31.5	650
	100	22 × 30	660
		16 × 45	770
18 × 35.5		770	
120	25.4 × 30	780	
	16 × 50	850	
	18 × 40	850	
	22 × 35	850	
150	22 × 40	880	
	25.4 × 35	900	
	22 × 45	1030	
	25.4 × 40	1050	
180	22 × 50	1170	
220	25.4 × 50	1380	
500	3.3	10 × 12	63
		10 × 12.5	63
	4.7	10 × 12	75
		10 × 12.5	75
	6.8	10 × 16	110
	8.2	10 × 20	141
	10	12.5 × 20	165
	22	12.5 × 30	260
	27	12.5 × 40	329
	33	12.5 × 45	370
		16 × 25	350
	39	12.5 × 50	420
		16 × 31.5	413
	47	16 × 35.5	462
		18 × 31.5	468
	56	22 × 25	510
		16 × 45	630
	68	18 × 35.5	600
		22 × 30	600
	82	16 × 50	685
		18 × 40	670
		25.4 × 30	700
	100	18 × 45	800
		20 × 40	800
		22 × 35	800
		22 × 40	800
	120	18 × 50	920
22 × 45		920	
25.4 × 35		900	
25.4 × 40		940	
150	22 × 50	980	
180	25.4 × 50	1250	